

PRODUCT DESCRIPTION

- Easy LED service (assembly and disassembly OPK-4 extrusion „on click”)
- Line of light in the built-in lighting fixture without visible aluminum elements
- Can build fixtures going seamlessly from built-in to suspended ones
- OPK-4 profile can be bent
- Smoothly changing lighting height
- Fits in the thickness of a drywall board 0,47"/ 12 mm
- Lighting fixtures can be combined to form lighting strings (ZM connectors)
- The standard TPK-4 profile comes with a “foam technical cover” that facilitates “clean” mounting of the fixture in the drywall




Fill empty fields


Product nr.	
Fixture type	
Company	
Job name	
Date	

TECHNICAL SPECIFICATION

C0370ANODA_1	Silver anodized	39.4"
C0370ANODA_2	Silver anodized	78.75"

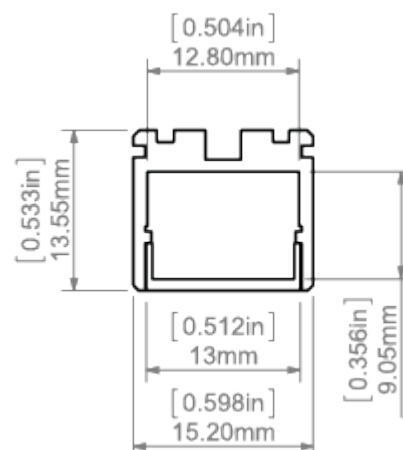

RELATED EXTRUSIONS



Ref: 18044

RELATED PRODUCTS


COVERS




Ref: 1370



Ref: 1369



Ref: 17031



Ref: 17040

110°



END CAPS




Ref: 24238


ACCESSORIES




Ref: 42512




Ref: 42717




Ref: 42719



Ref: 42718



Ref: 42716



Ref: 00293



Ref: 42728



Ref: 42215




Ref: 42213



Ref: 42720



Ref: 00802




Ref: 42520



Ref: 42256




Ref: 42250




Ref: 70261

COUPLERS - CONNECTION METHODS FOR PROFILES




L135




L135PW




L135PZ




L90




L90PW




L90PZ




T135L




T135R



T90



X135



X90