



Profile HR-SLIM

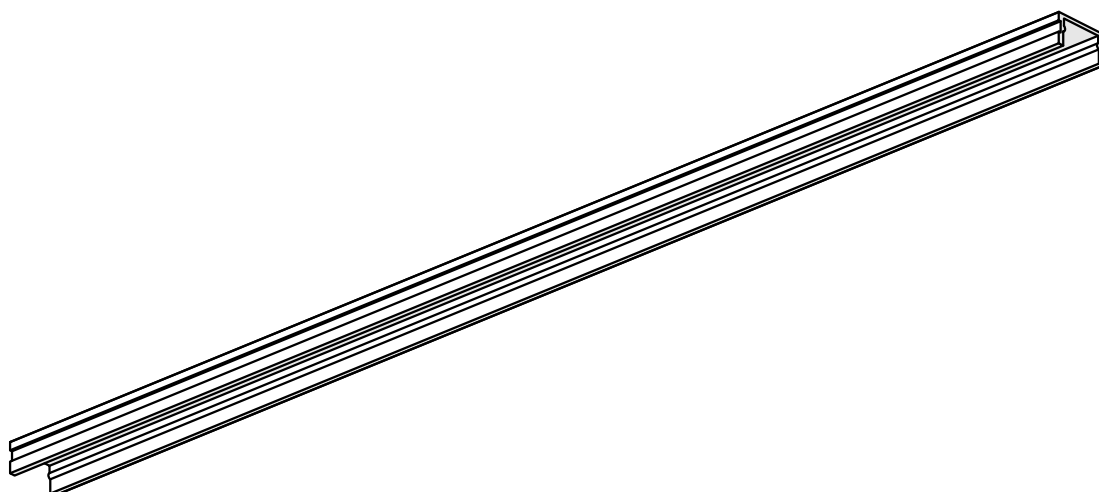

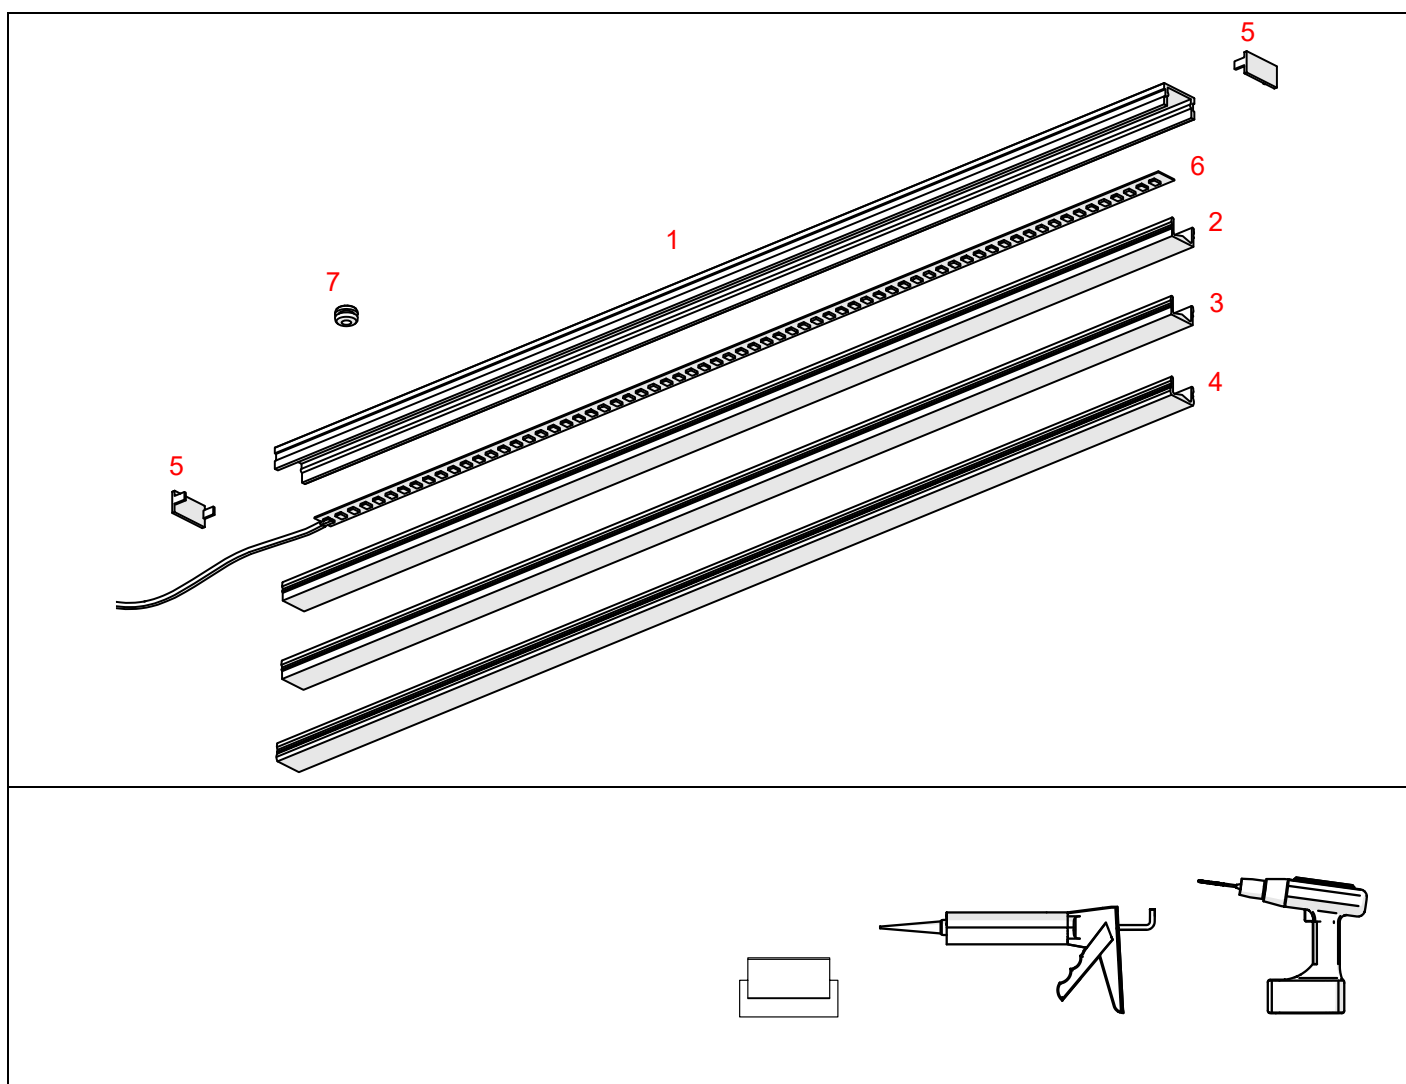


- 1. Profile HR-SLIM (Ref. A00015)
- 2. Protective insert TECH-15 (Ref. C28287)
- 3. Cover HR-15 (Ref. B17153)
- 4. Cover HR-IP-15 (Ref. B17154)
- 5. End cap HR-SLIM (Ref. C28302C01)
- 6. LED tape*
- 7. Gland*

* The full range of accessories and electronics is available at www.KlusDesign.com


NOTE! ! All LED tapes must be connected to a 24 V power supply.

IMPORTANT: Not all possible mounting procedures are presented here. More mounting procedures and related accessories can be found at www.KlusDesign.com. Drawings in these instructions are simplified and only approximate the actual shapes.


I

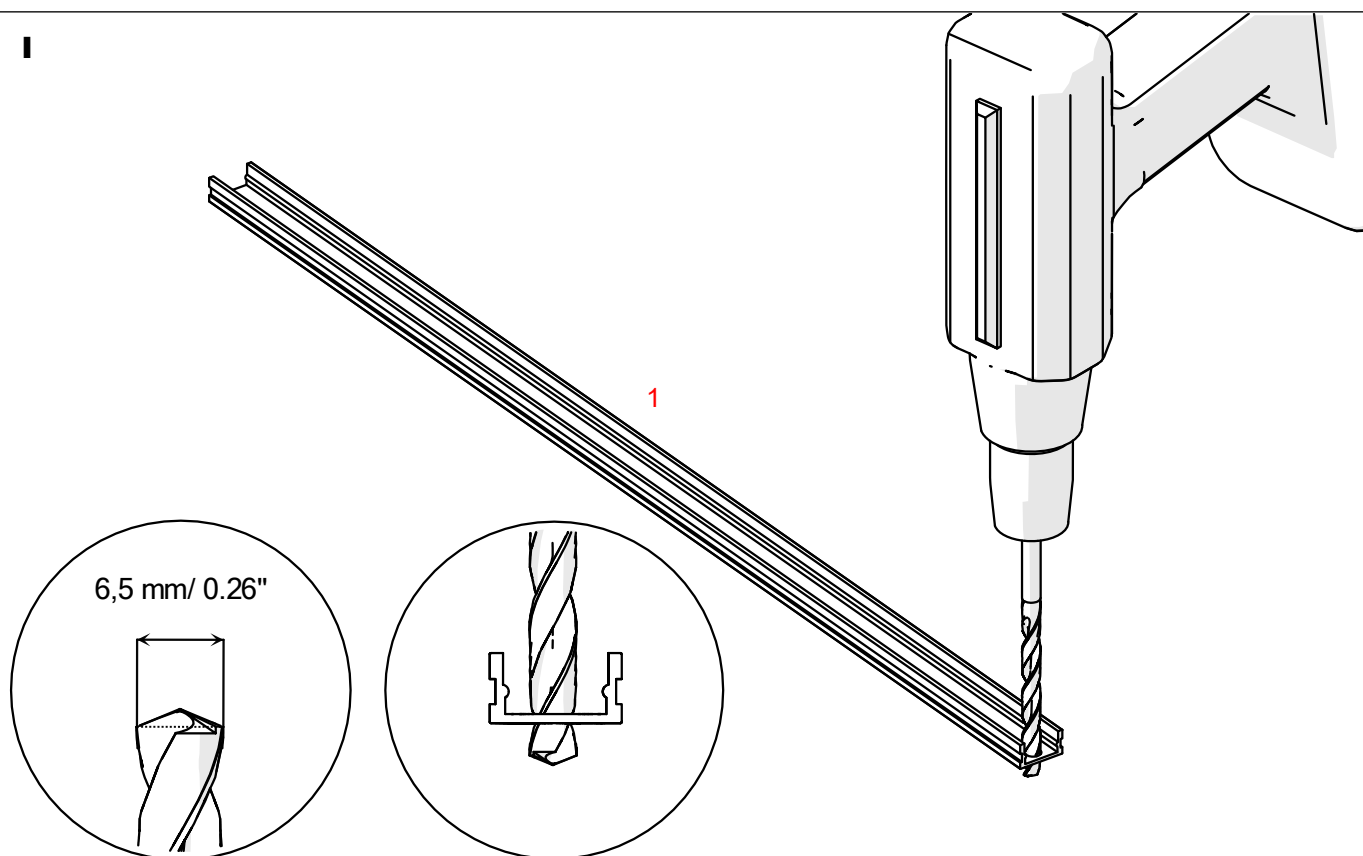


II






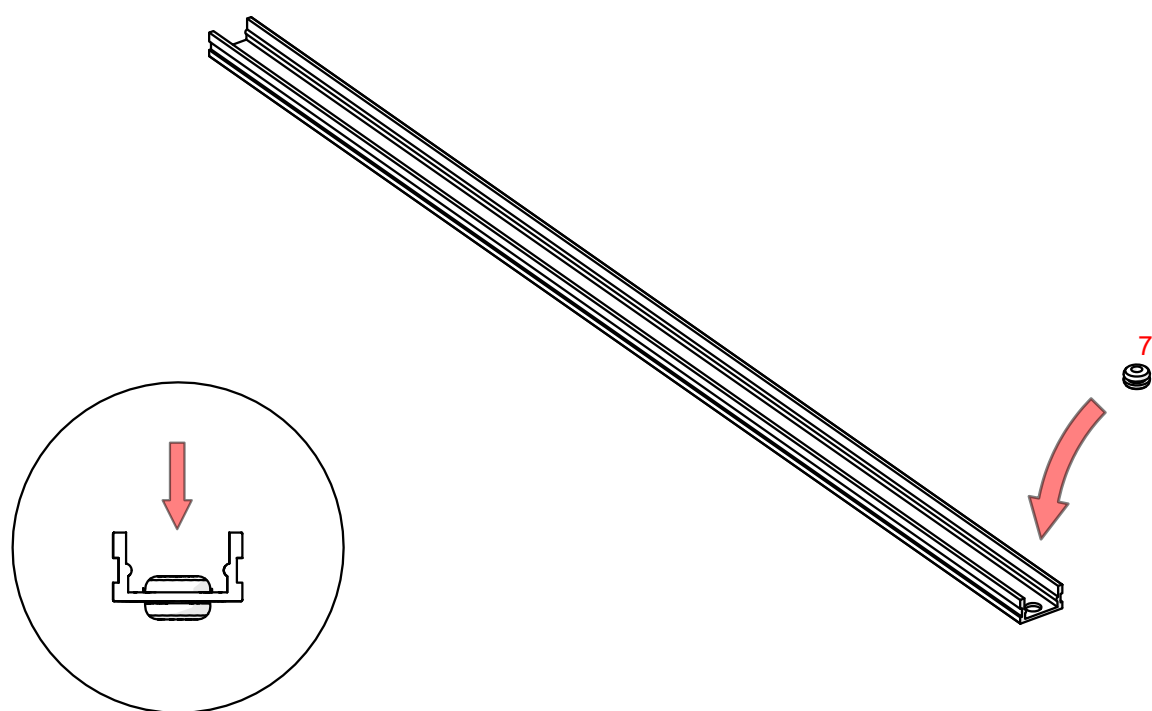


III

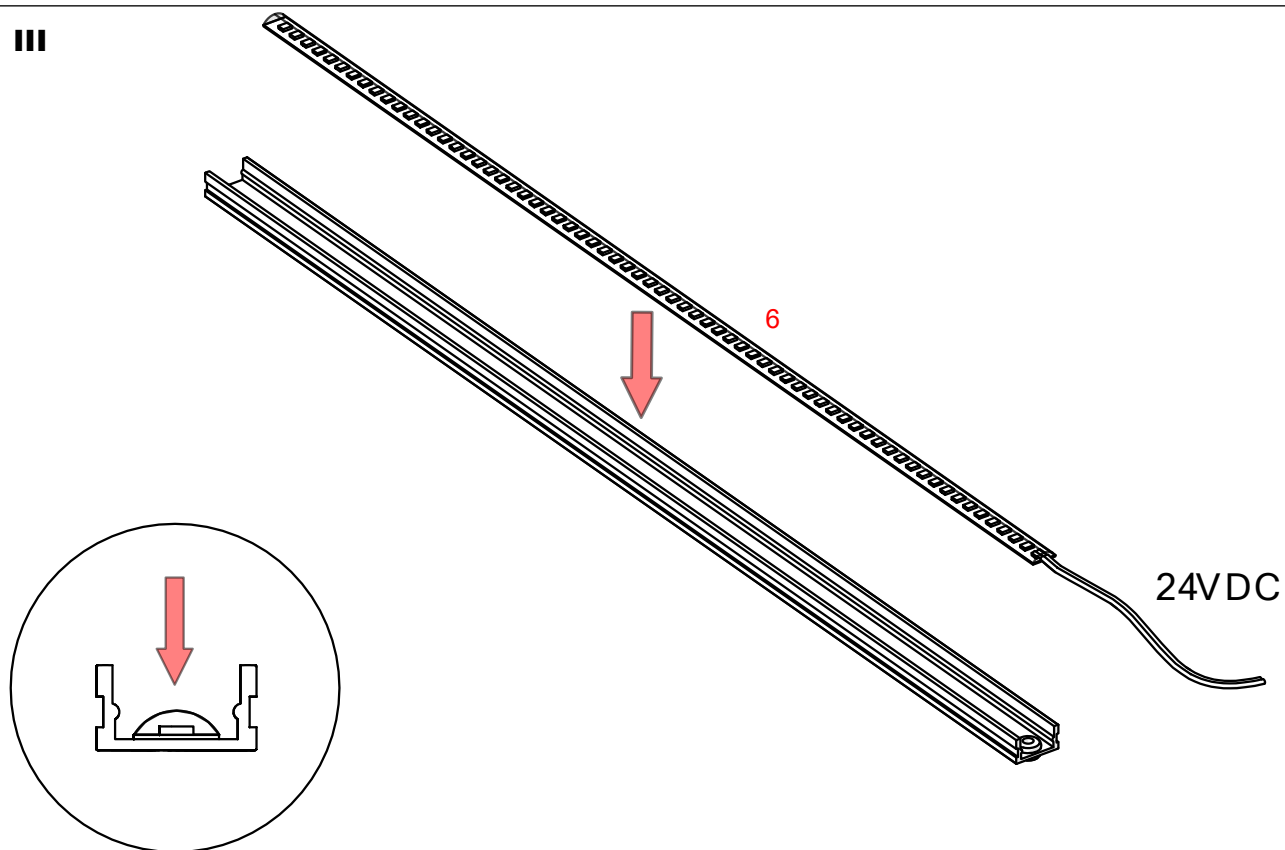


IV

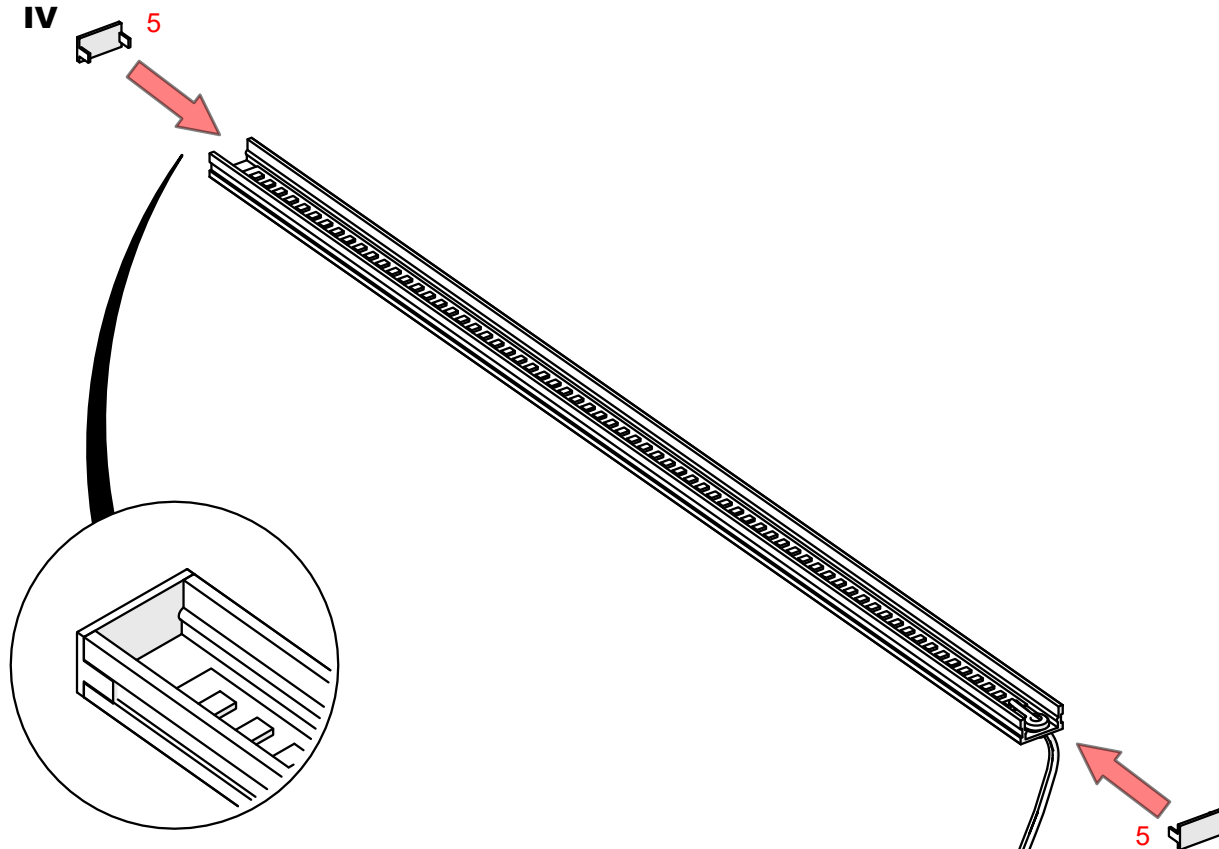

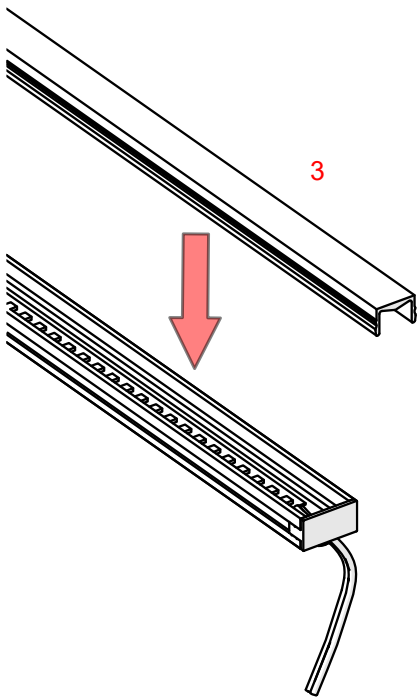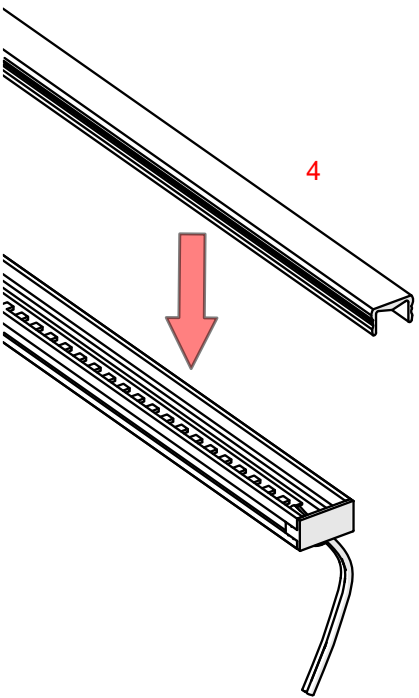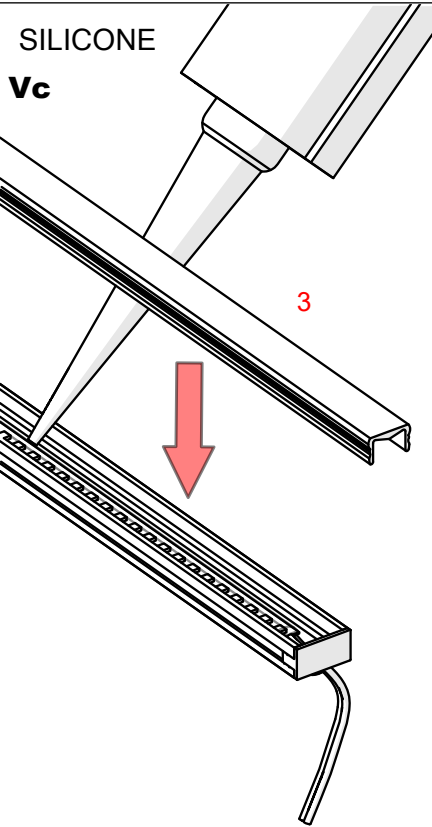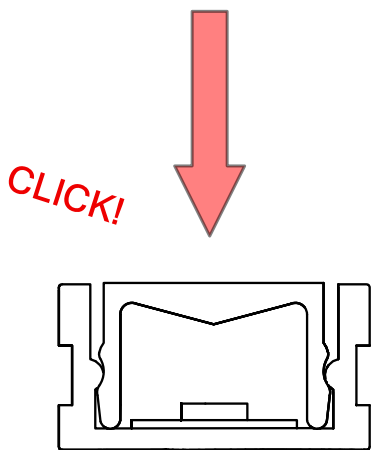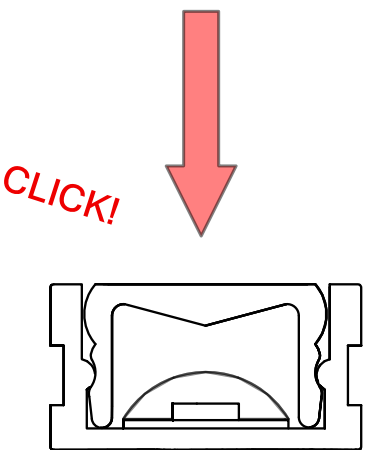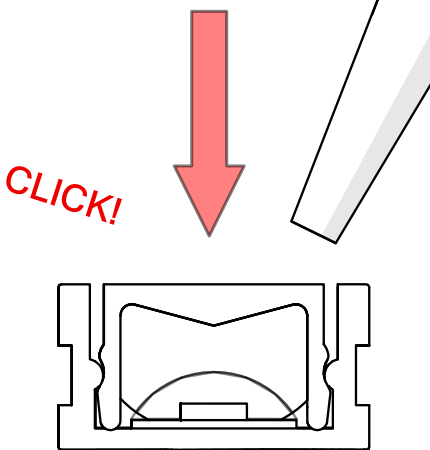
Va 	Vb 	Vc SILICONE 
Va  Cover HR-15 IP 20	Vb  Cover HR-IP-15 IP 65	Vc  Cover HR-15 + silicone IP 67

VI

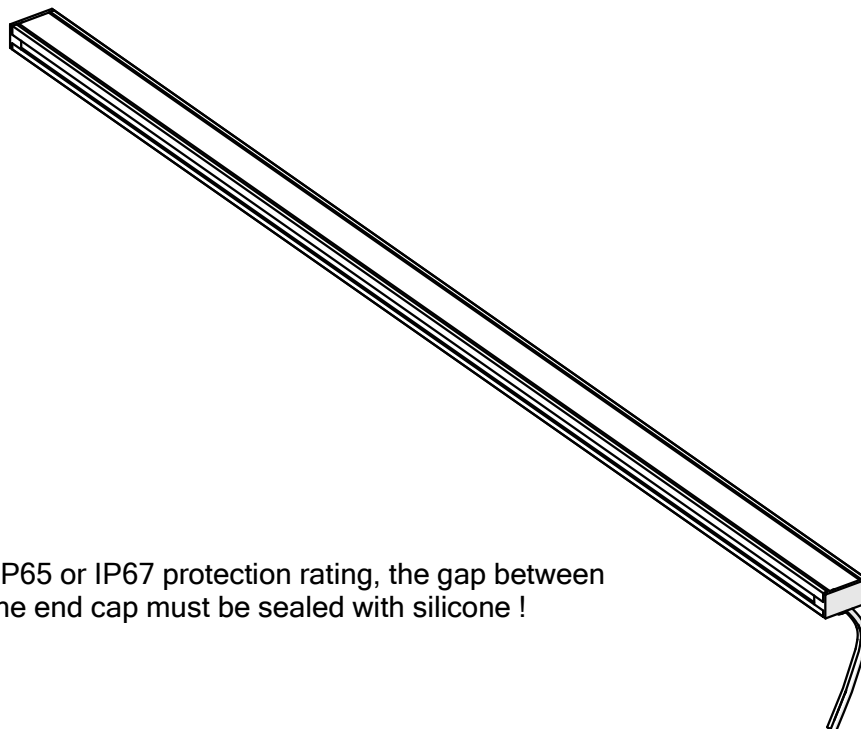




To achieve an IP65 or IP67 protection rating, the gap between the cover and the end cap must be sealed with silicone !



VII

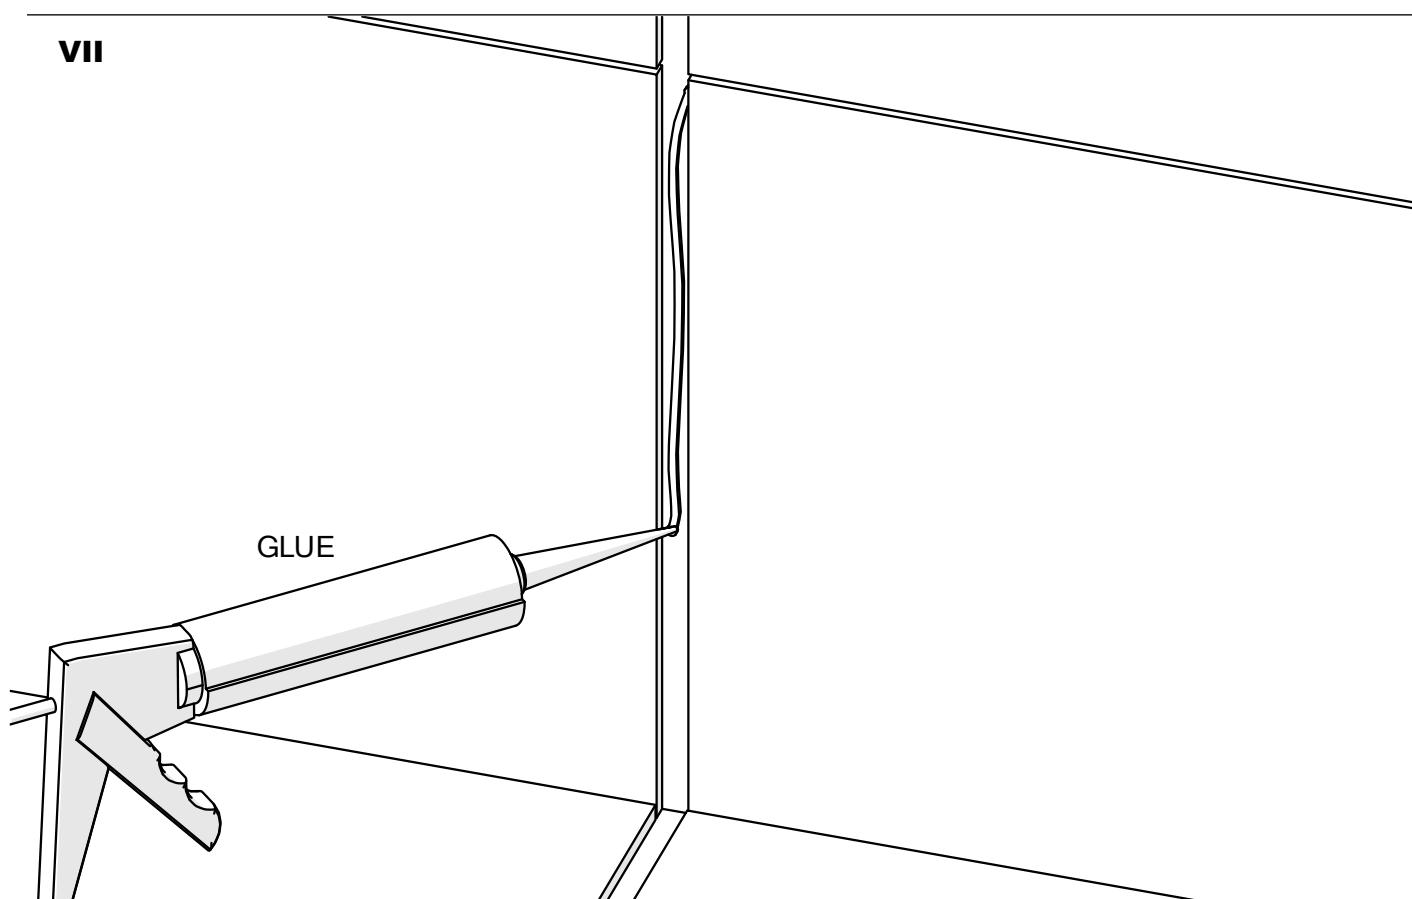


VIII

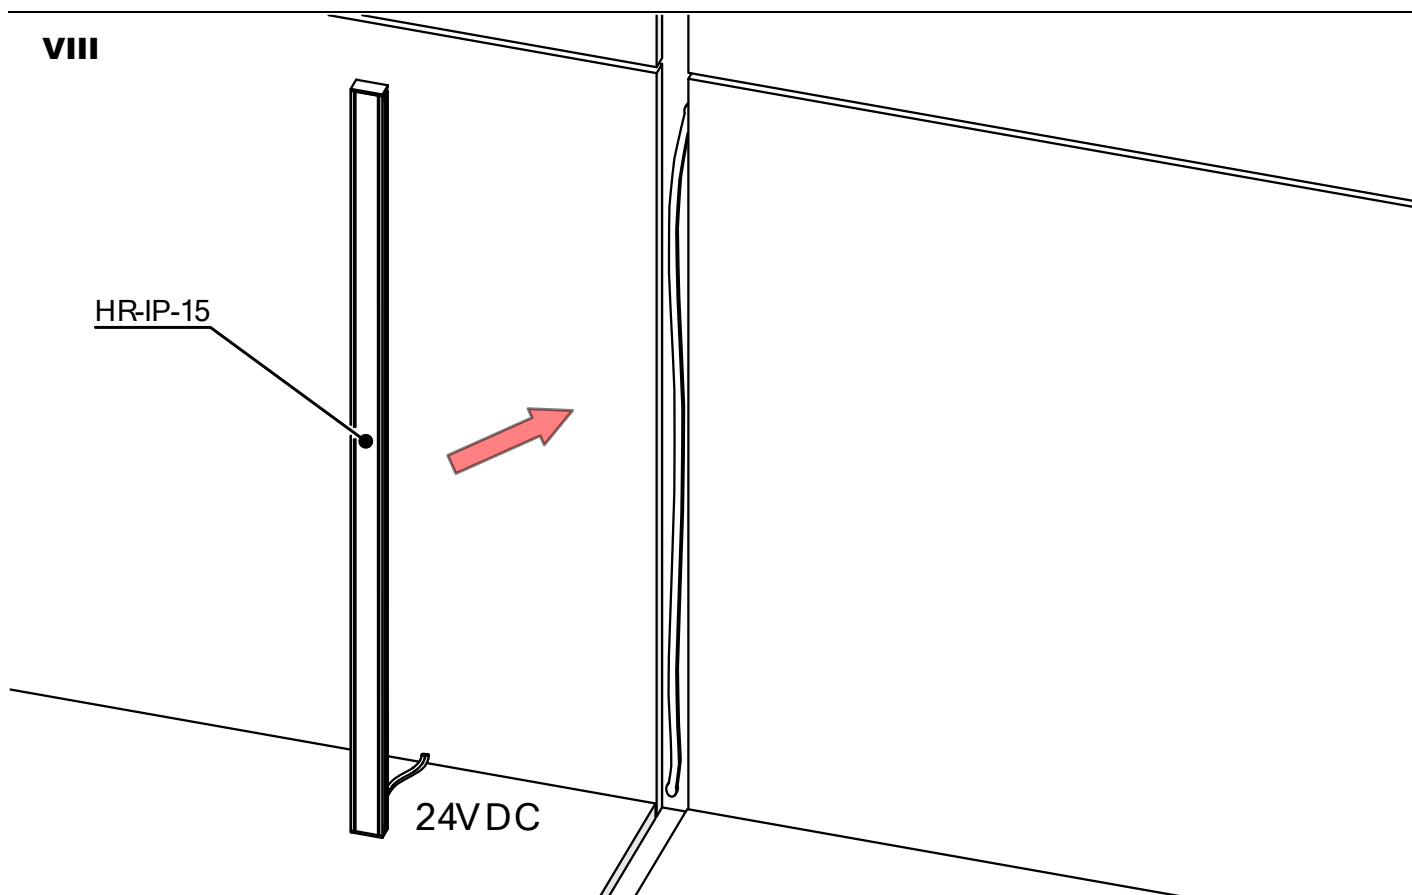

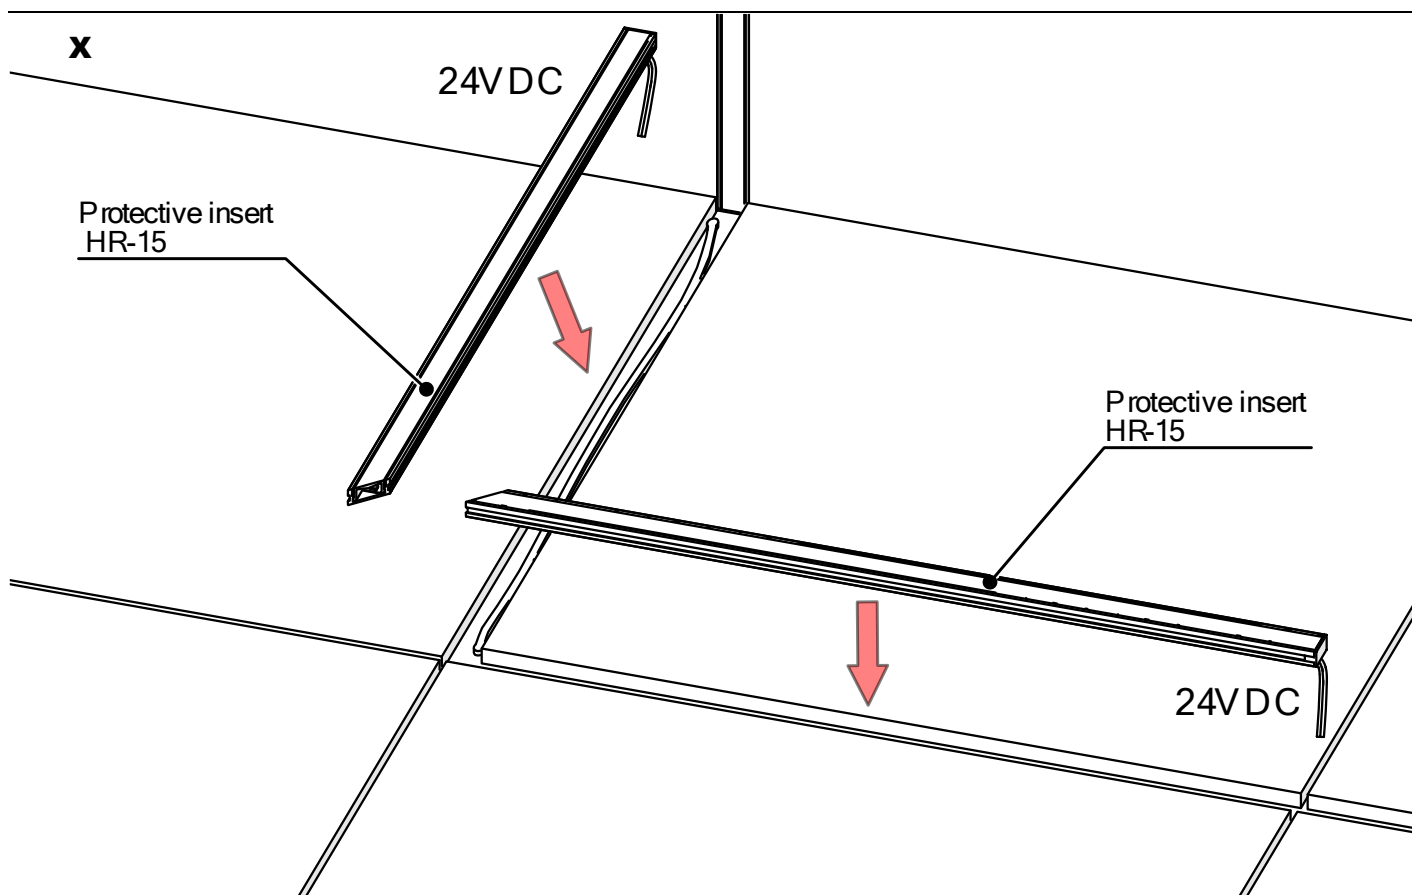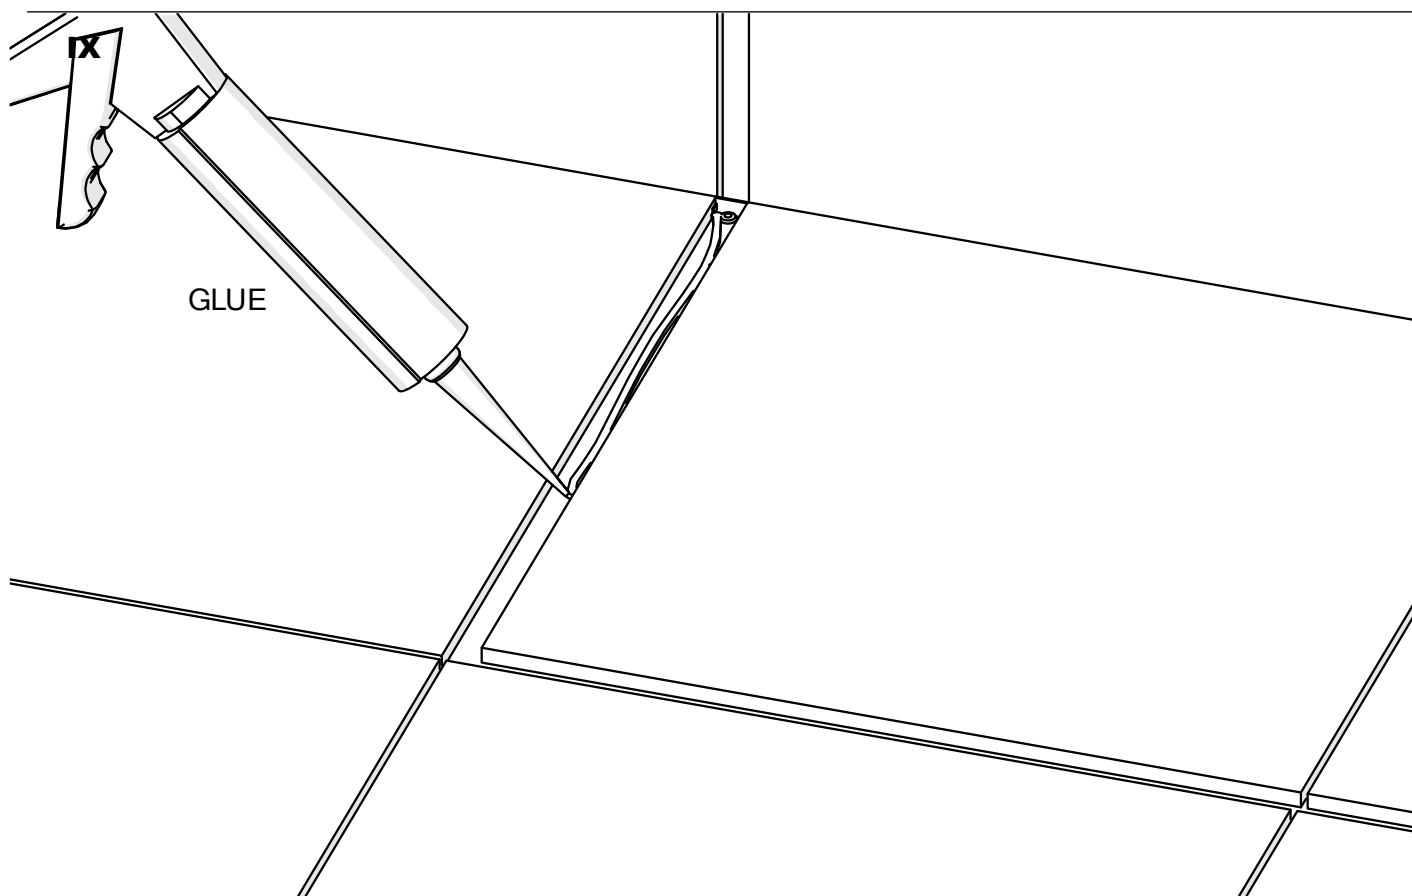


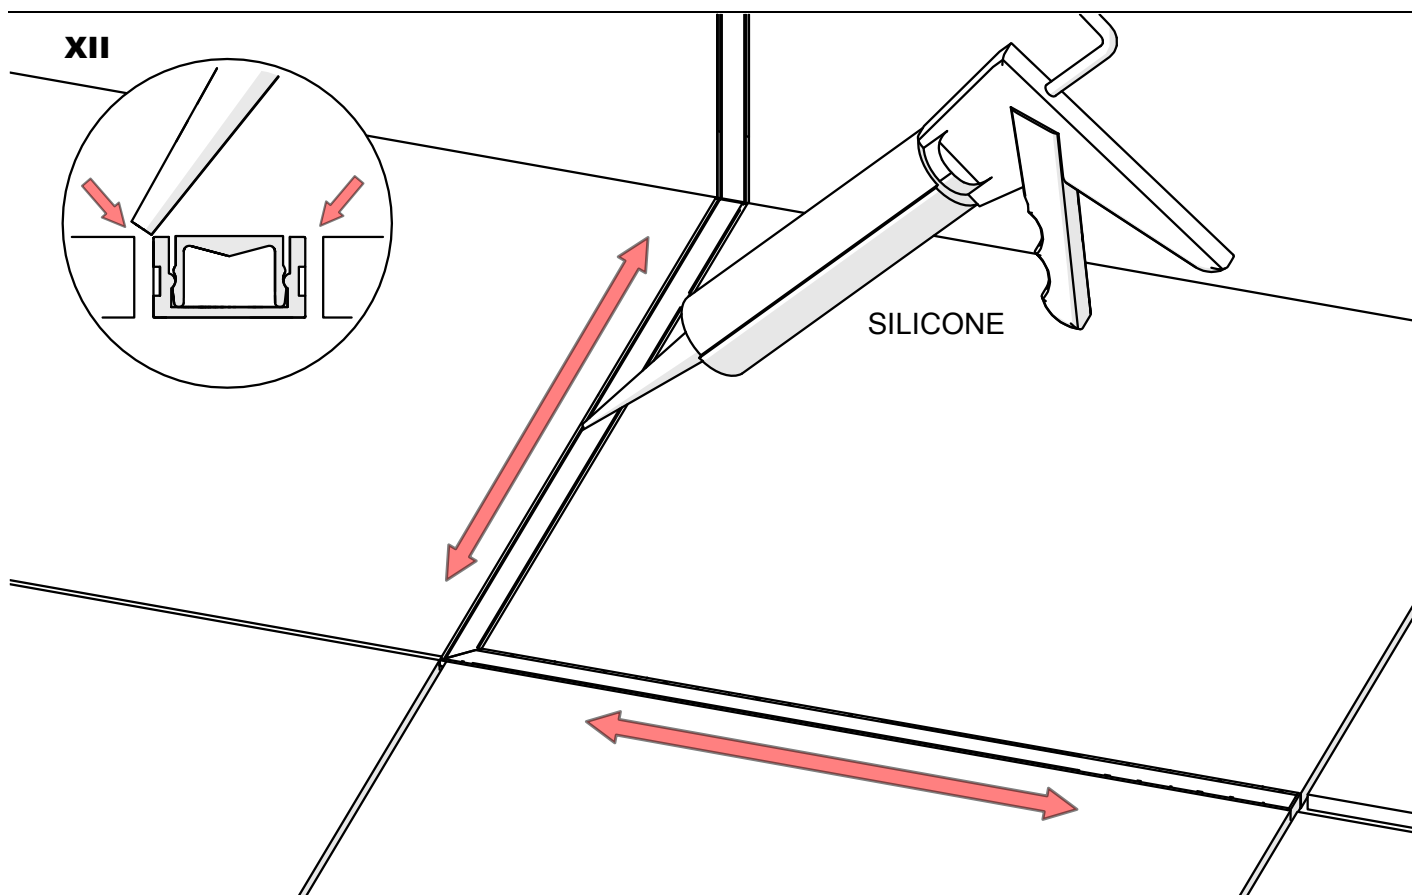
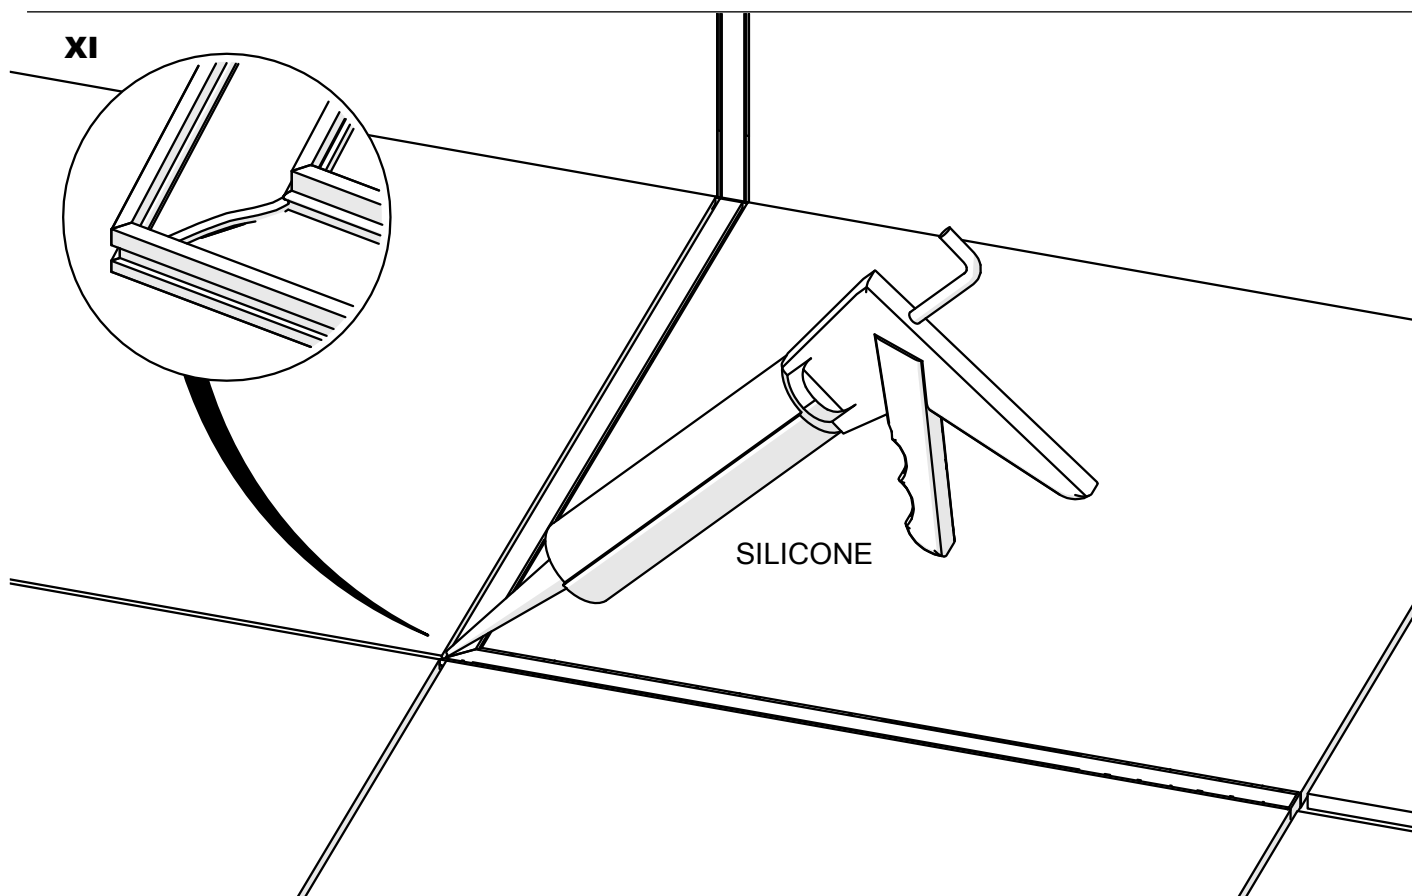


XIII

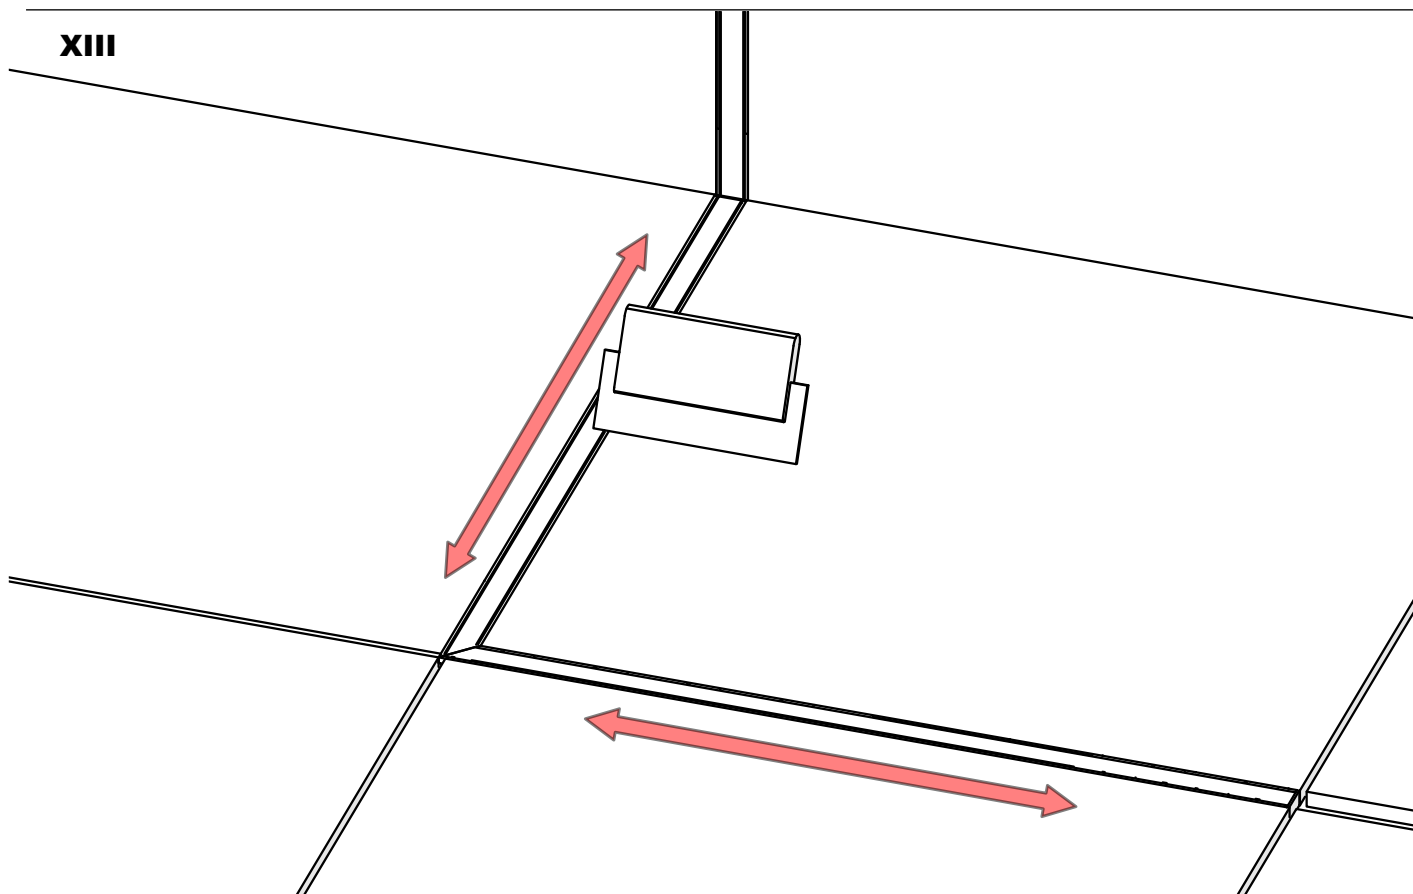


XIV

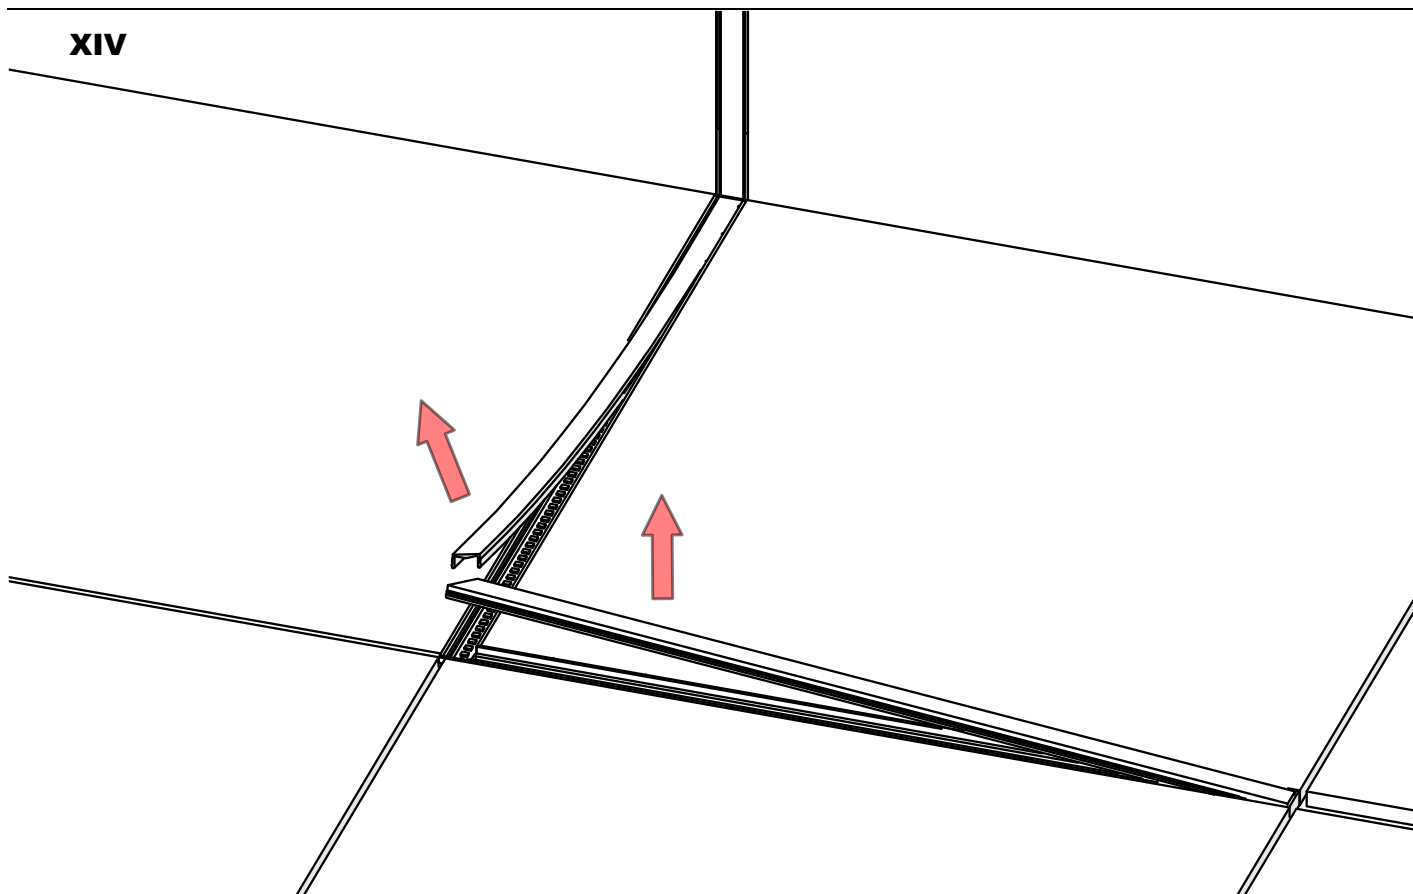

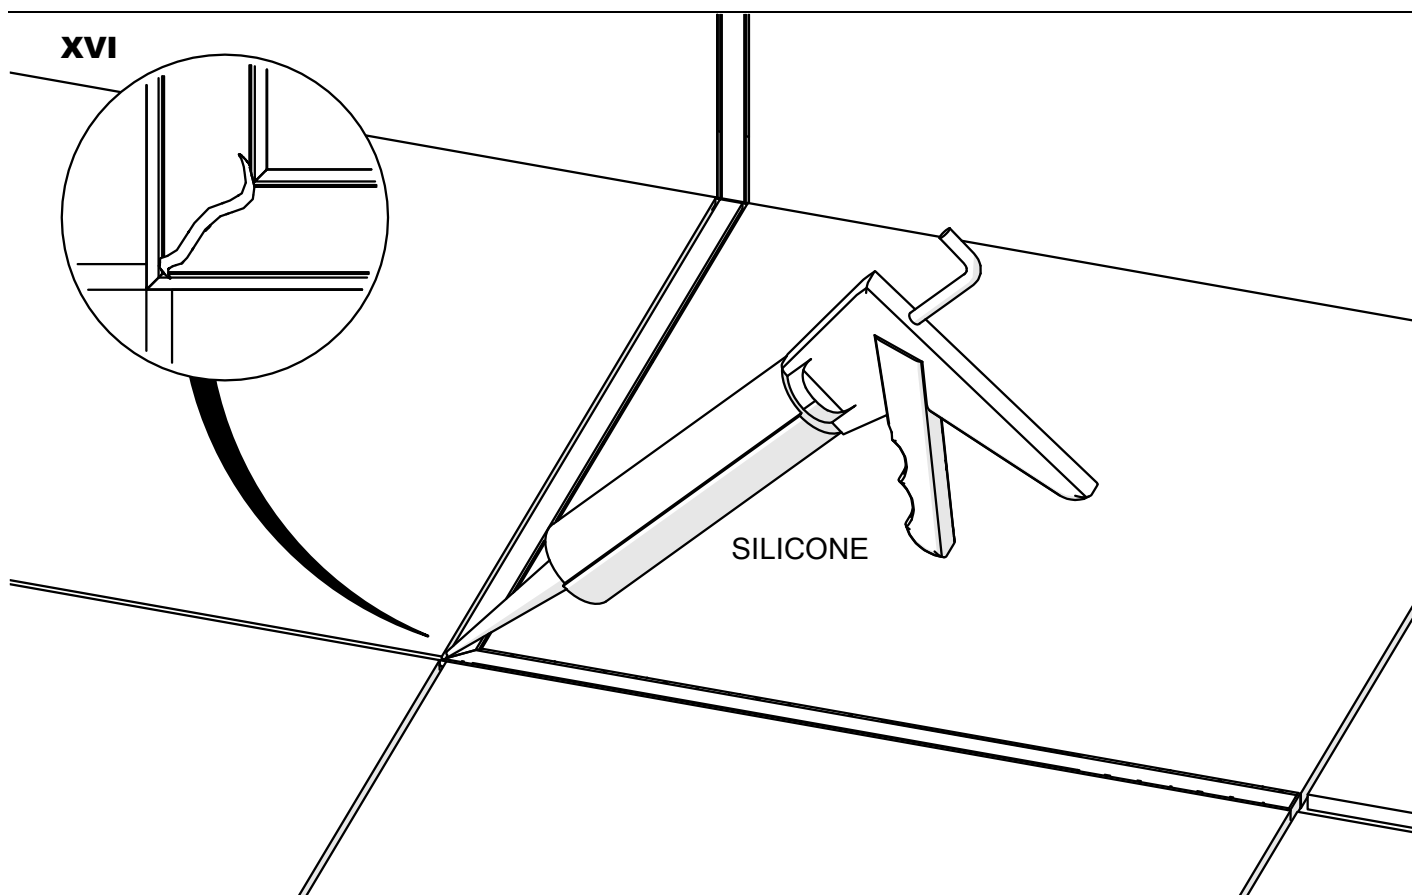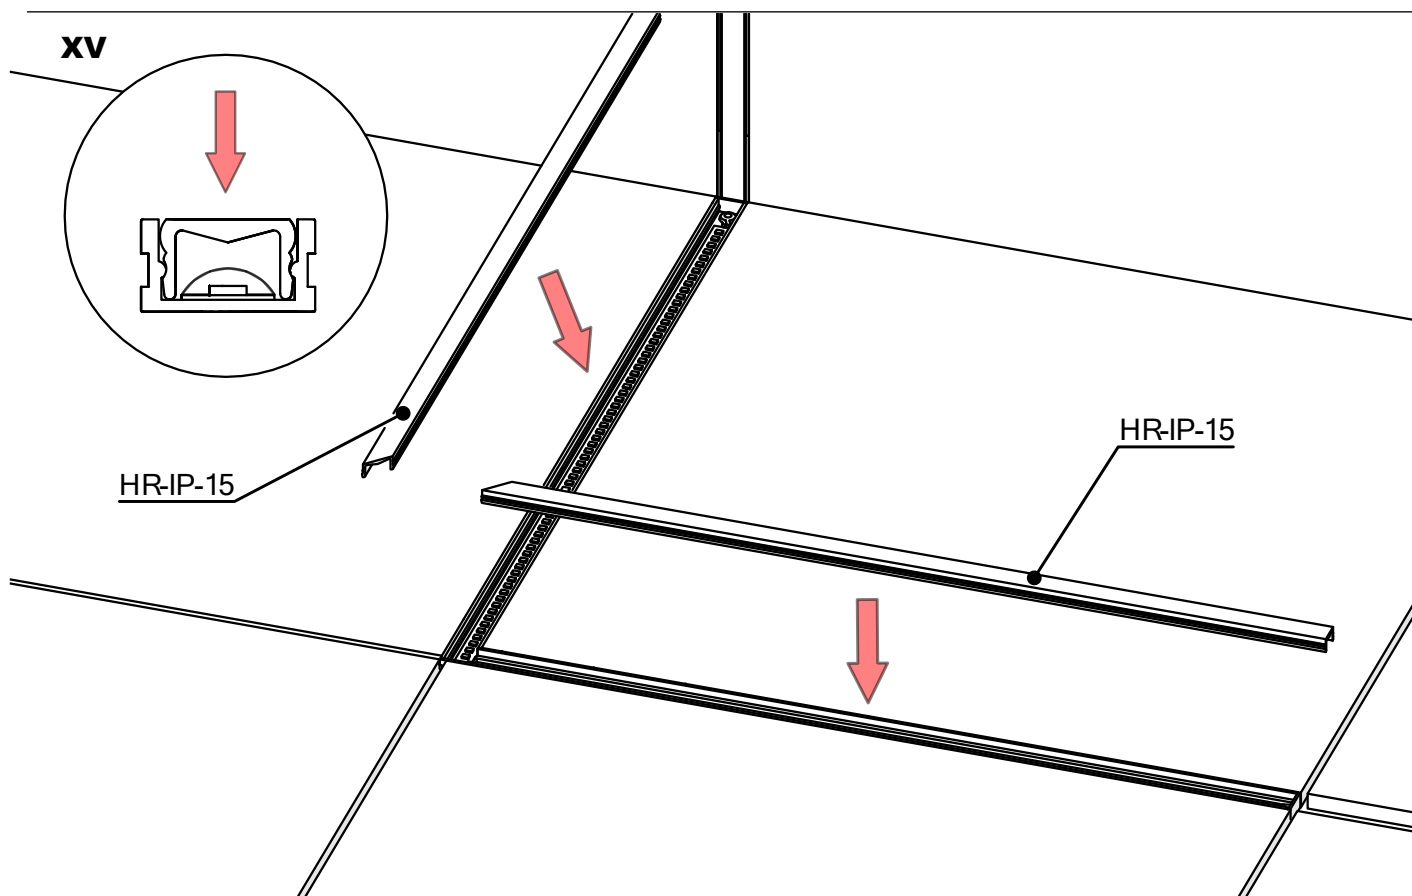

XVII

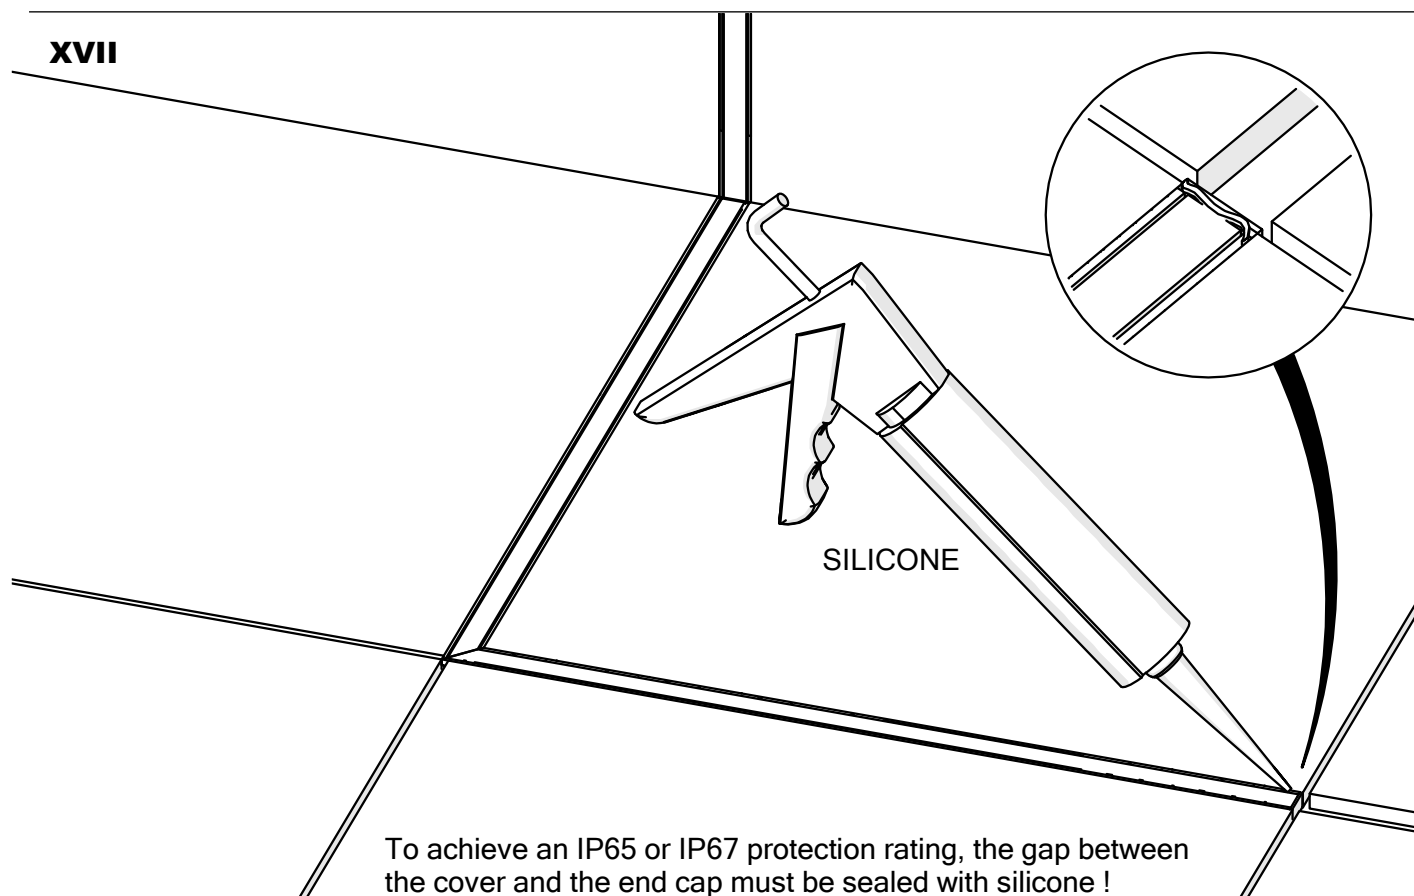

XVIII

