



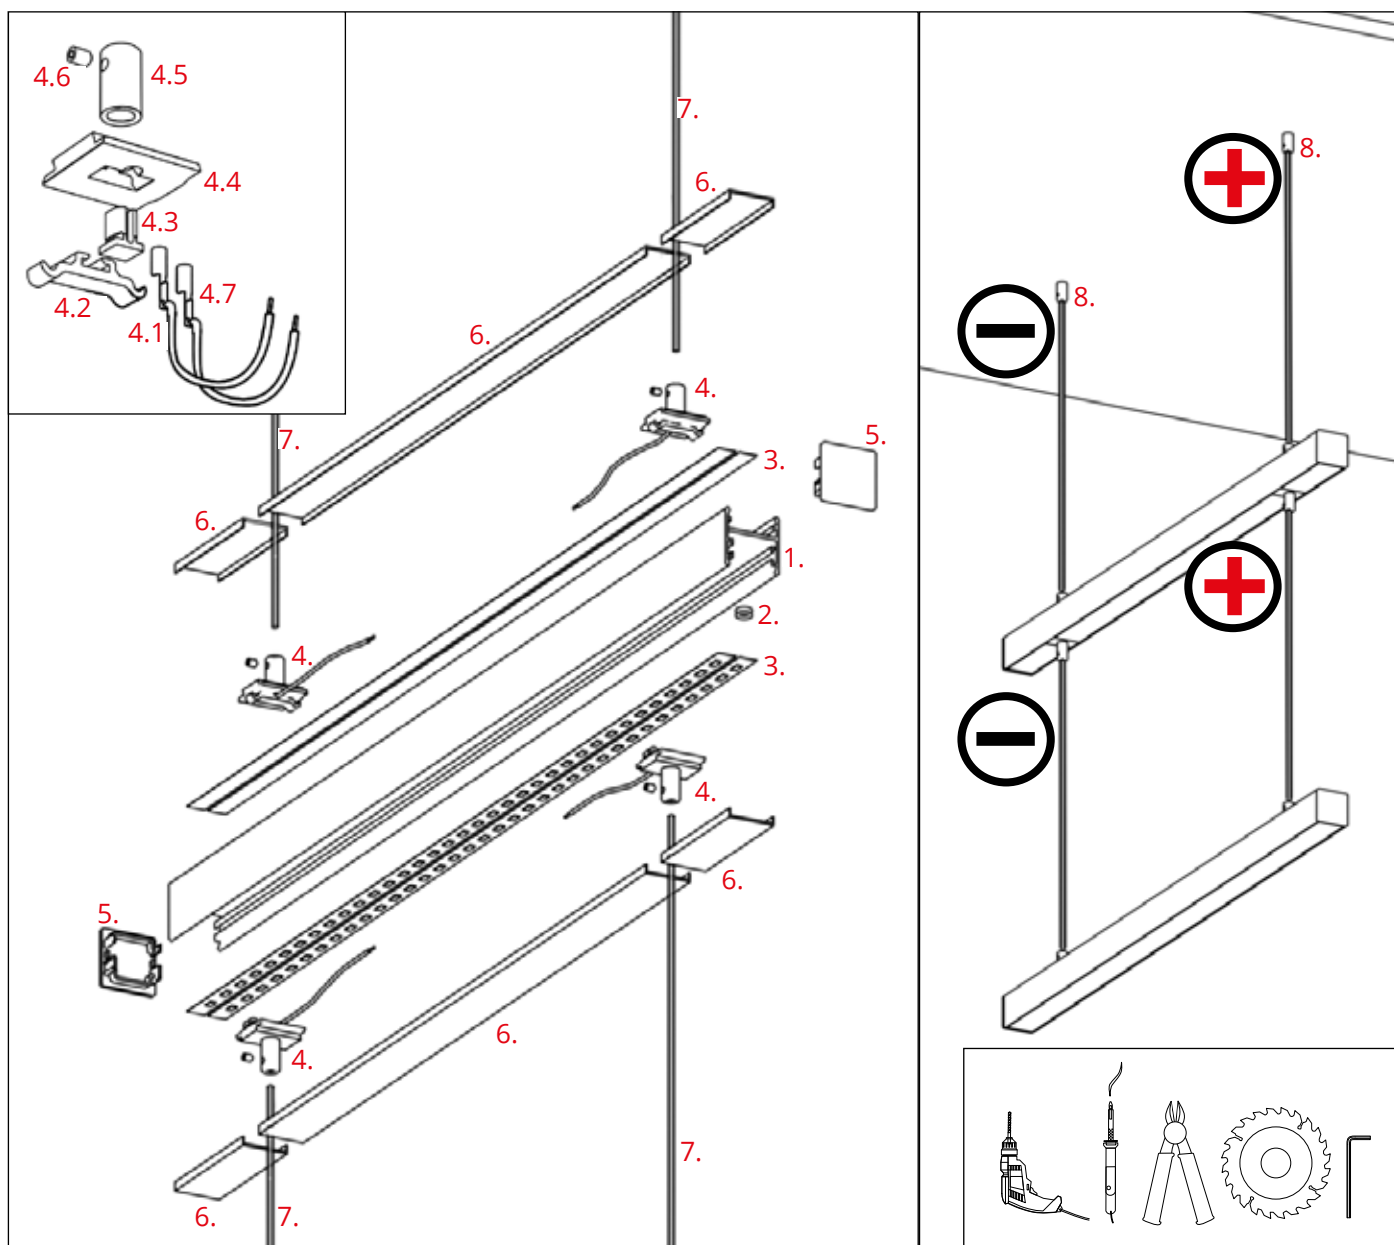


- | | |
|-------------------------|---------------------|
| 1. GLAZA-DUO profile | 5. End cap |
| 2. Gland | 6. Cover |
| 3. LED tape | 7. Rod |
| 4. OS22-PRET-Z fastener | 8. Ceiling fastener |
| 4.1 Conductor | |
| 4.2 Blockade | |
| 4.3 Threaded hook | |
| 4.4 Base | |
| 4.5 Head | |
| 4.6 Pressure screw | |
| 4.7 Spare conductor | |

NOTE! The lifting capacity of a single fastener is 2,5 kg. Designing multi-level lighting installations should take into account the weight of individual fixtures and choose the number of fasteners accordingly.





NOTE! All LED tapes must be connected to a 12 V or 24 V power supply.


IMPORTANT: Not all possible mounting procedures are presented here. More mounting procedures and related accessories can be found at www.KlusDesign.com. Drawings in these instructions are simplified and only approximate the actual shapes.

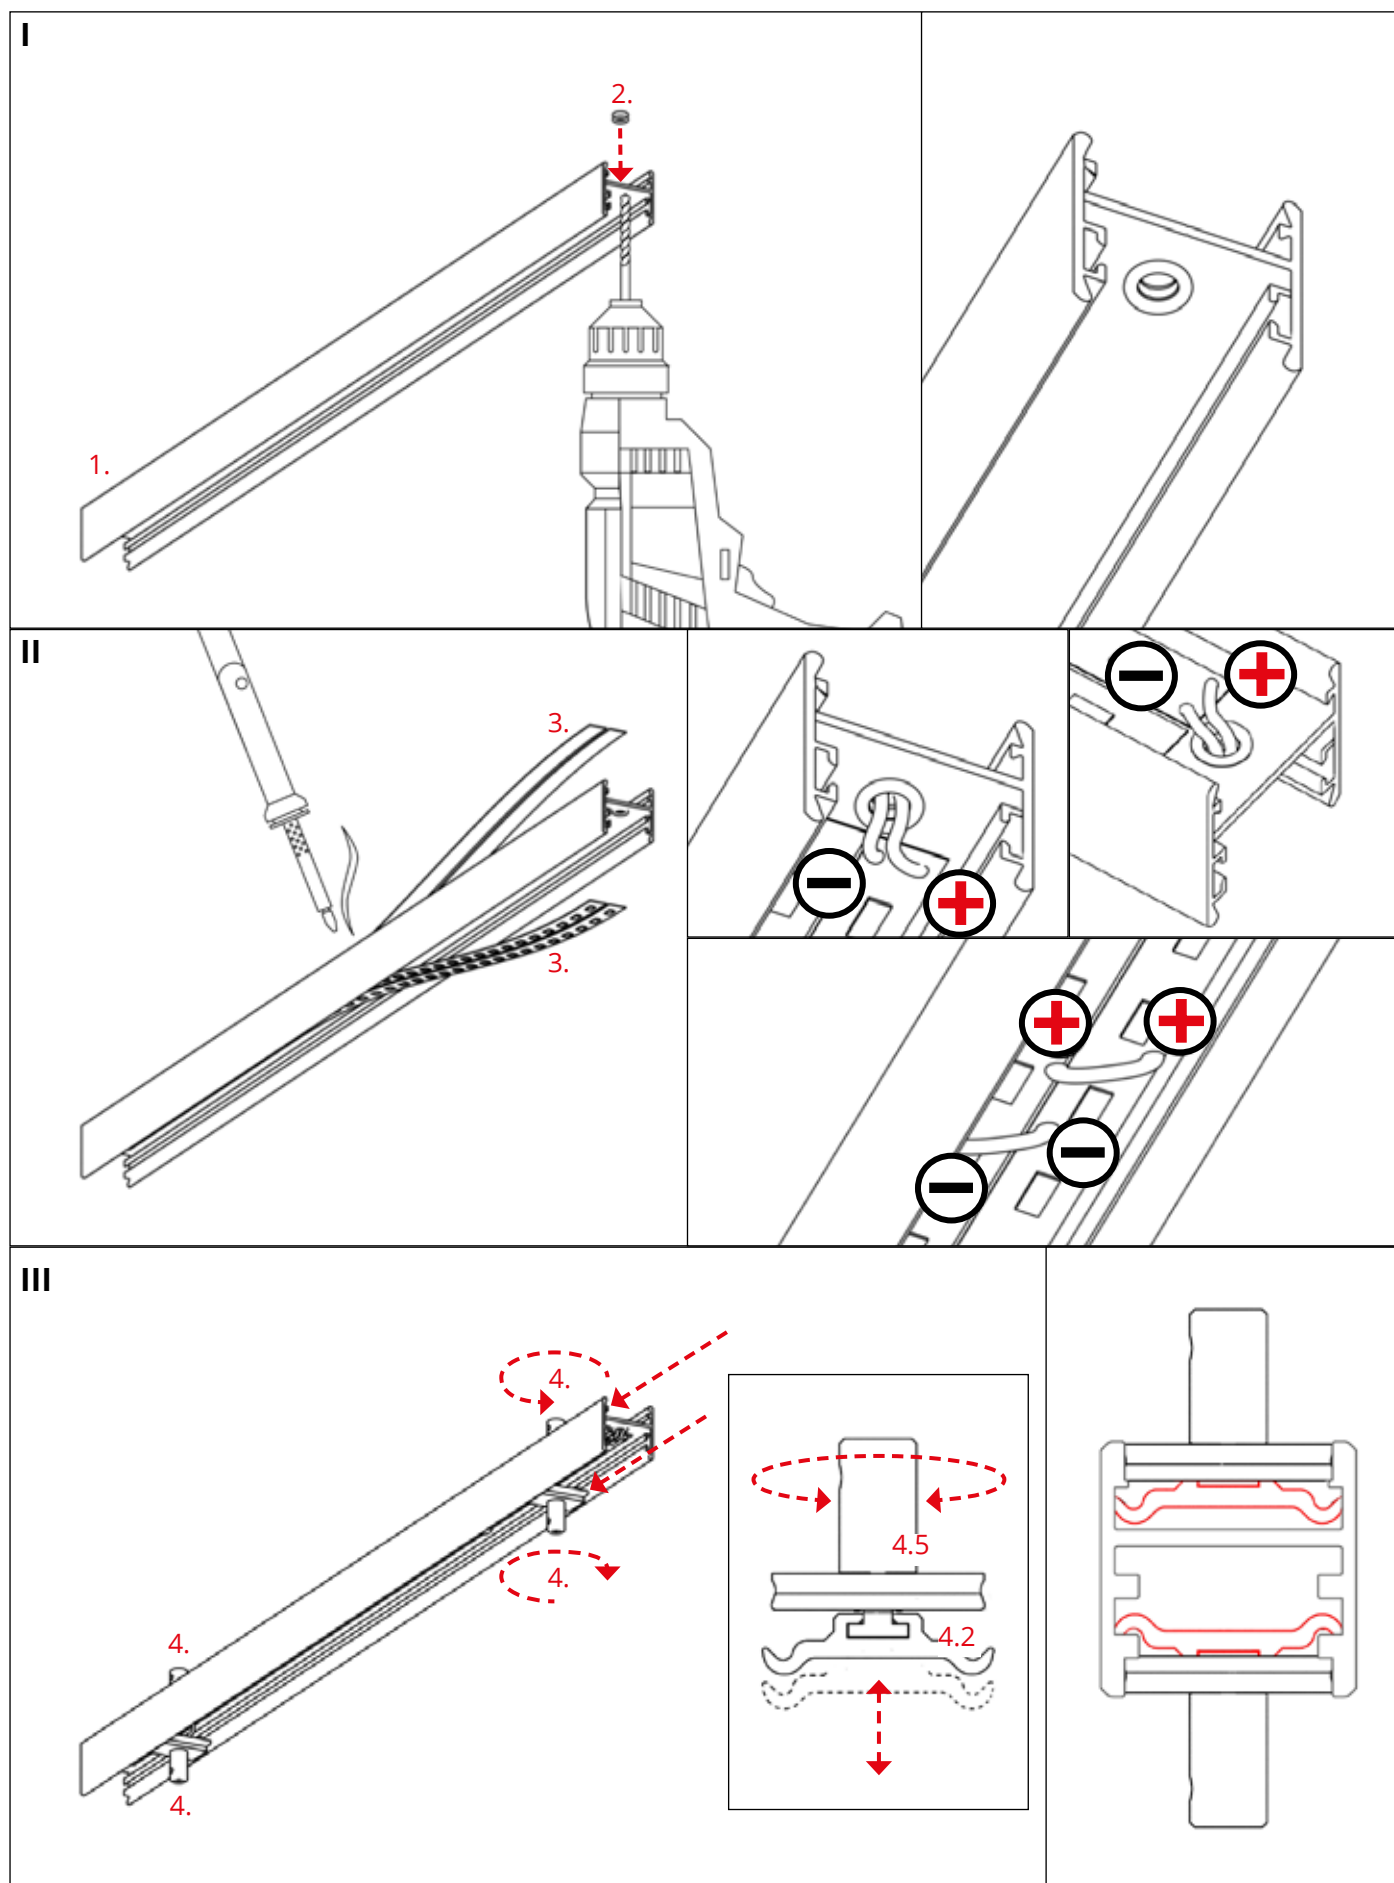


IV

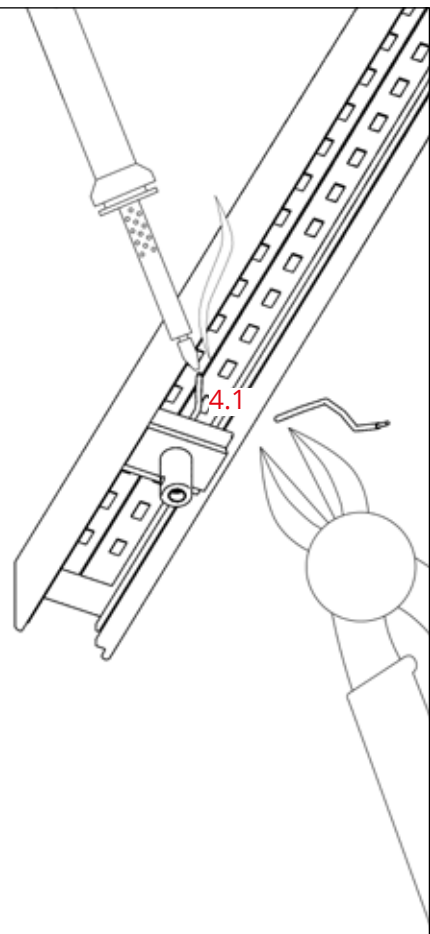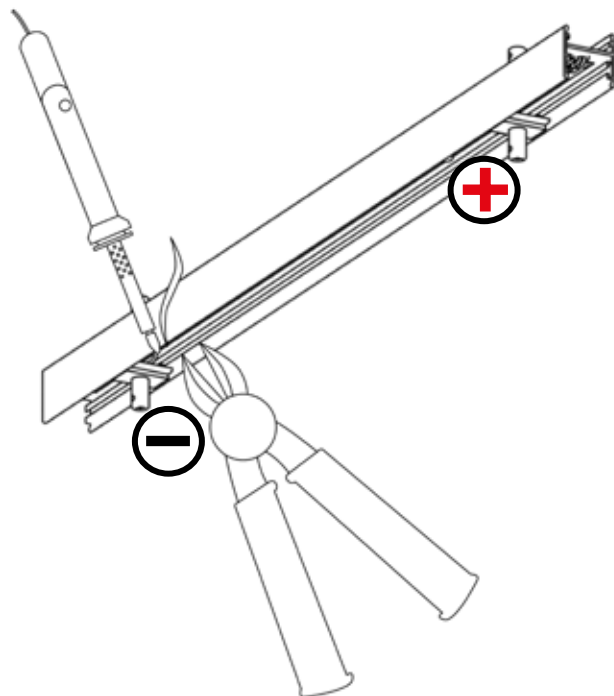

V

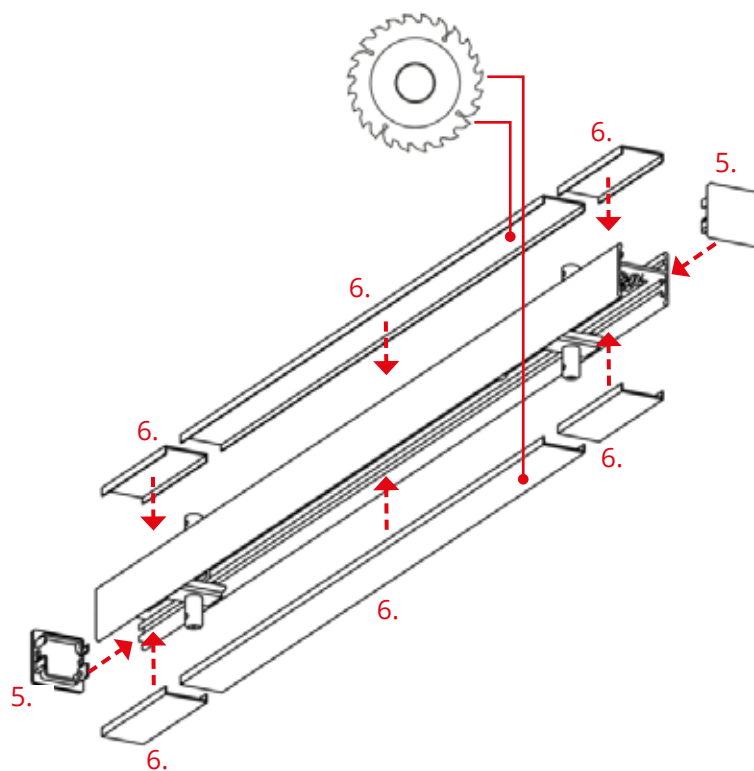

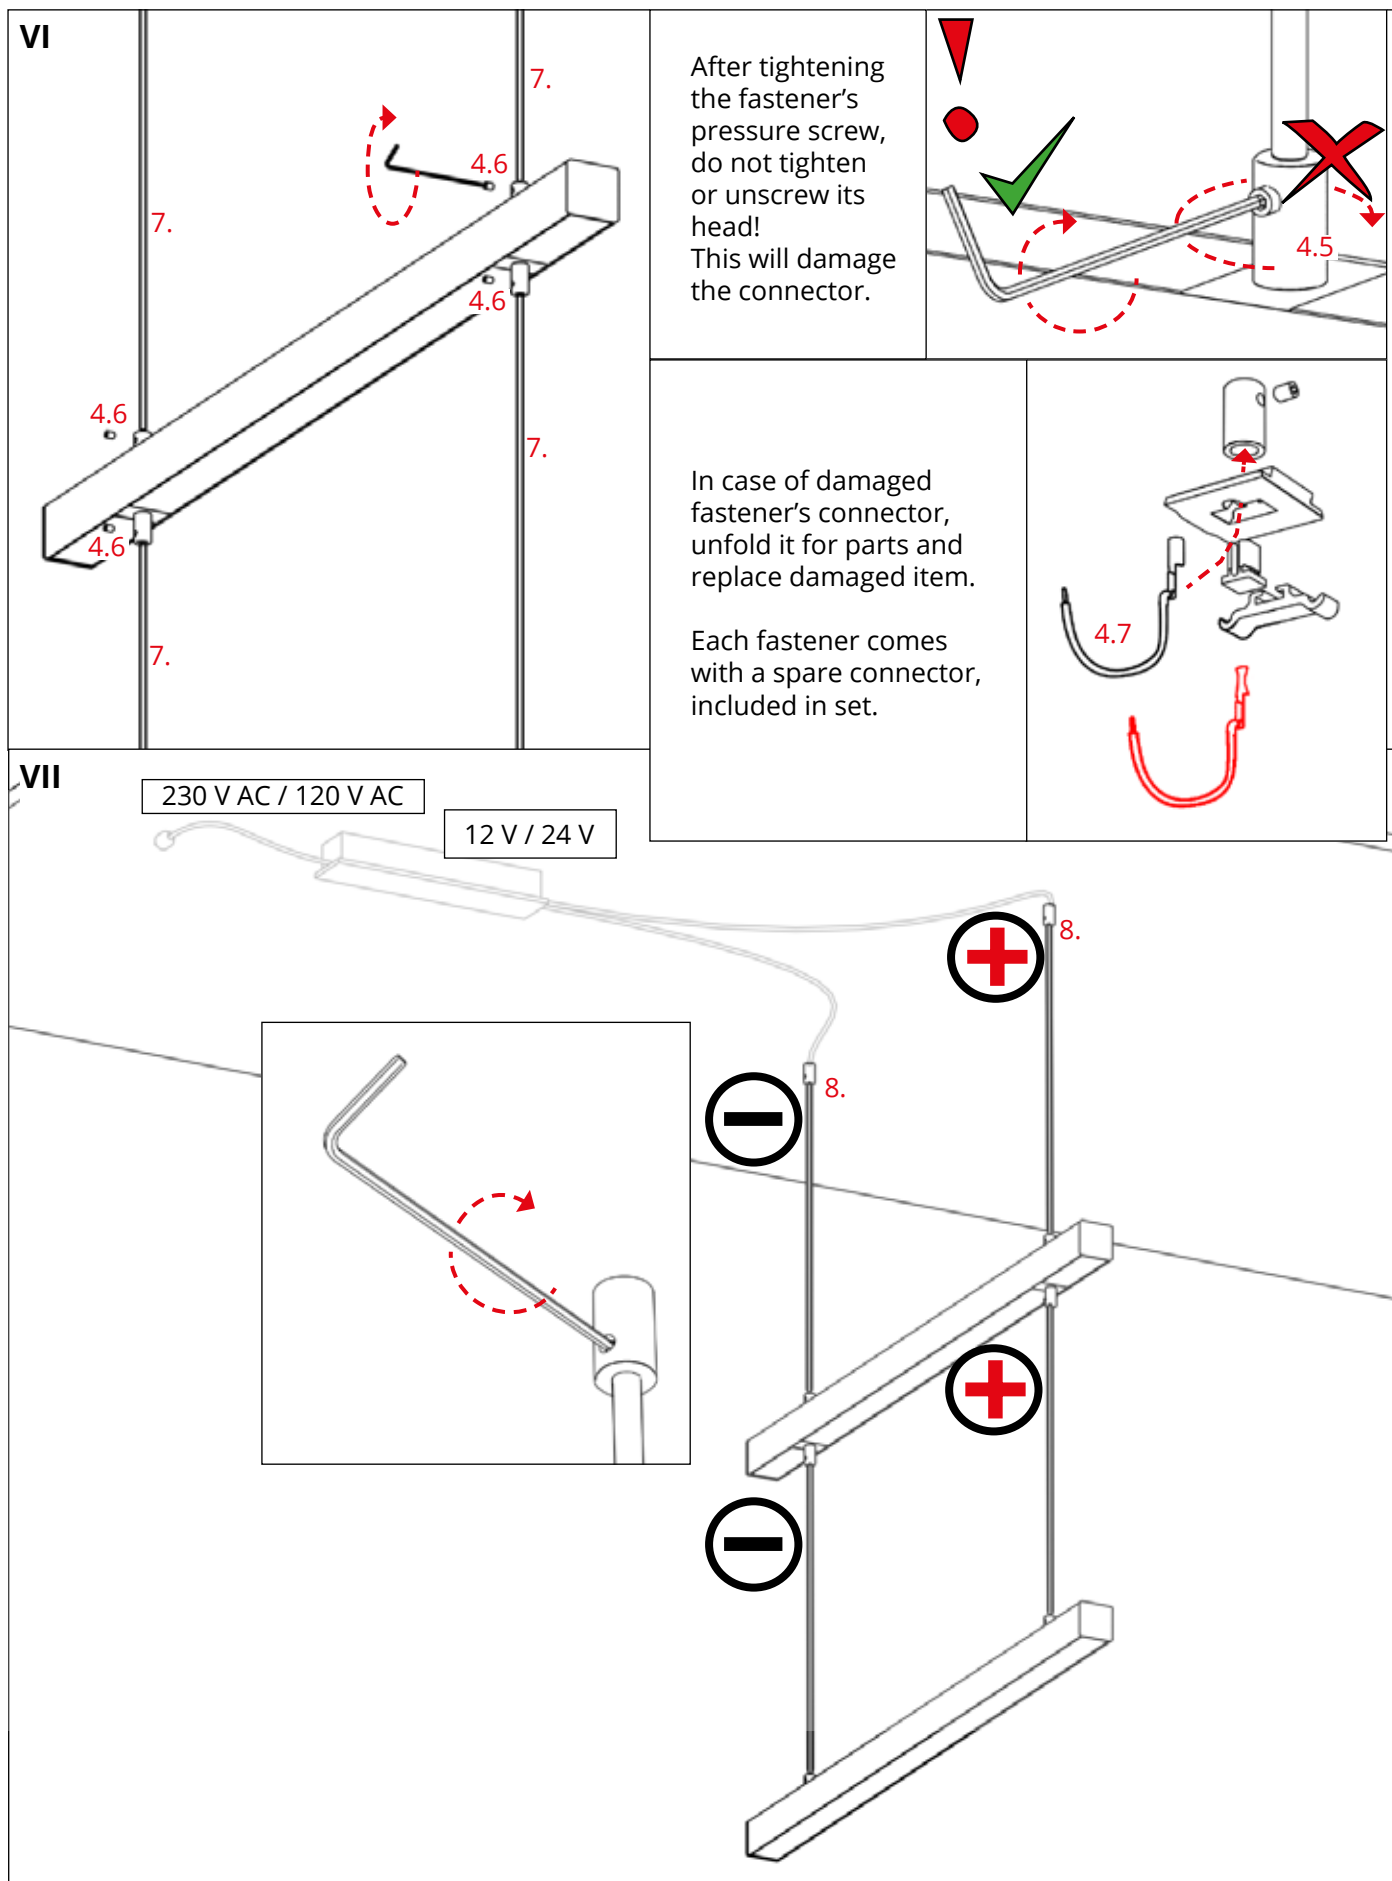

**OPTIONAL: PROPOSAL OF RECESSED AND SUSPENDED
FIXTURES CONFIGURATION.**

