SPIRA-1

Installation and operating instructions

Table of contents

About the product	2
Preparation of mounting points	3
Installation of anchors and mounts	4
Installation of ceiling components	5
Preparation of the luminaire and suspension cables	6
Suspending the luminaire	7
Adjustment of height and geometry	8
Routing the 24 V DC cable	9
Installation of the power supply, connection and final inspection	10
Maintenance, disposal, EU compliance and disassembly	11


Fully assembled luminaire

Installation: suspended

CE • LVD • EMC • RoHS


24V DC

DIMENSIONS:

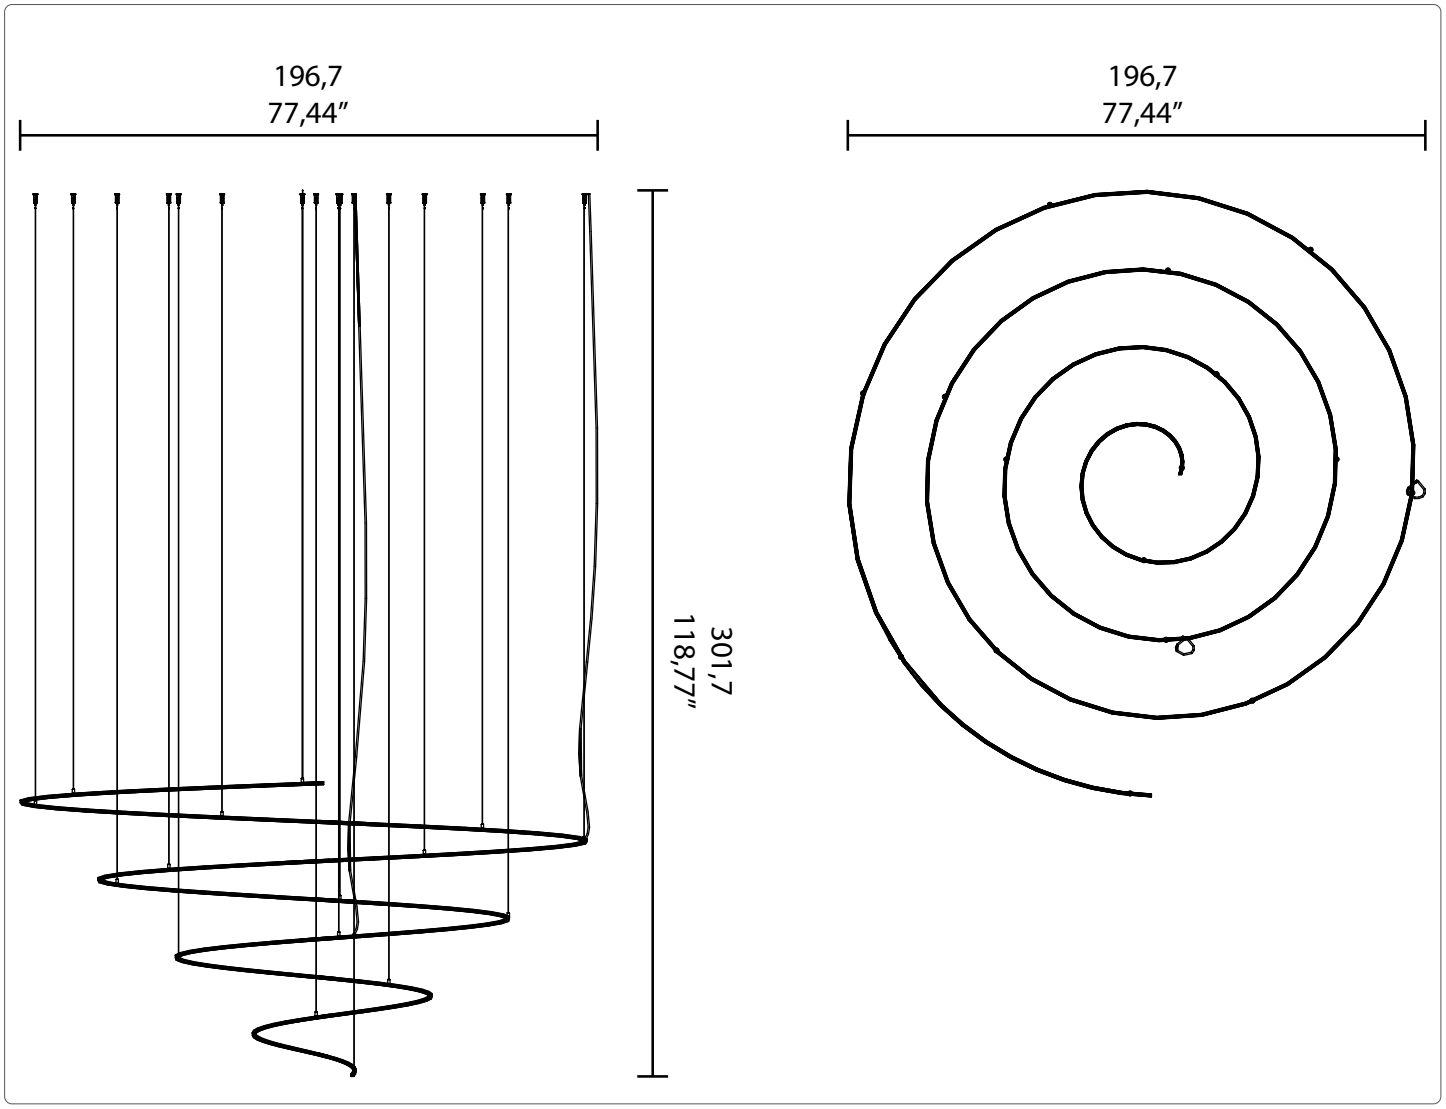

KLUŚ LLC
3755 9th St. Southwest
Vero Beach, FL 32968

SPIRA-1 is a complete luminaire designed for suspended installation. The luminaire is powered by 24 V DC from a suitably rated power supply. These instructions describe mechanical installation, suspension adjustment and low-voltage connection.

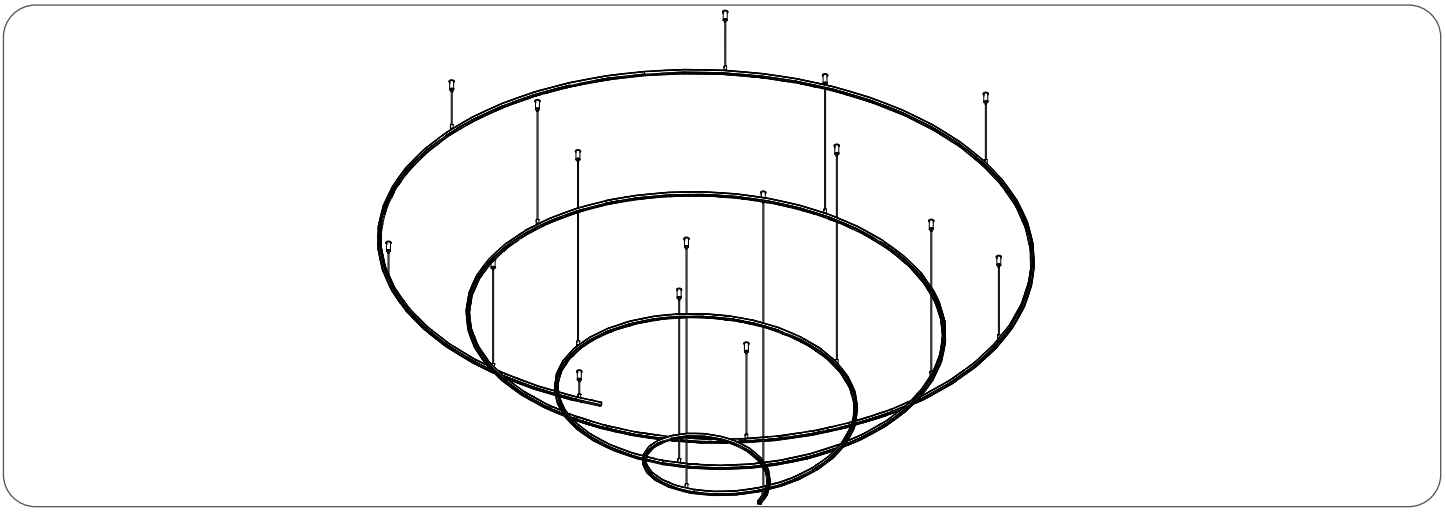

THE KIT INCLUDES:

- SPIRA-1 luminaire (complete)
- Suspension components / mounting accessories (depending on configuration)
- Instructions

THE KIT DOES NOT INCLUDE:

- Screws and anchors suitable for the substrate (not always included)
- Control components (if included in the luminaire version)
- 24 V DC power supply, if not included in the selected configuration

REQUIRED TOOLS:

- Drill and drill bits suitable for the substrate and anchors used Spirit level Cross-line
- laser or other marking tool
- Screwdriver
- Hex key suitable for the mounting screws

SAFETY

- Disconnect the power before installation, cleaning or servicing.
- Installation and electrical connection must be carried out by suitably qualified personnel.
- Do not modify the luminaire. Use only compatible components.
- Do not use the product if it is damaged.


KLUŚ LLC
3755 9th St. Southwest
Vero Beach, FL 32968

Preparation of mounting points

- Marking all suspension points according to the technical data sheet or mounting template and drilling holes suitable for the selected anchors.


Step 1 - Mark out the mounting points

- Determine the final position and orientation of the luminaire.
- Align a cross-line laser or other marking tool with the planned installation axis.
- Mark all suspension points on the ceiling according to the technical data sheet or mounting template for the relevant version.
- Check the symmetry, alignment and relative positions of the points.

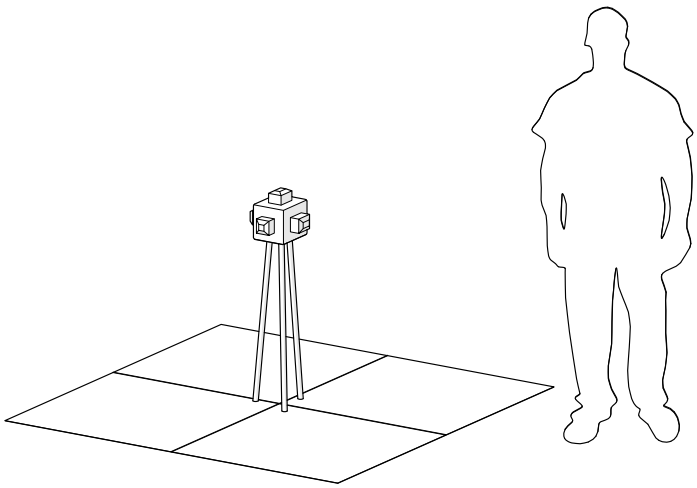

Step 2 - Drill the mounting holes

- Before drilling, make sure there are no cables or other concealed services at the marked locations.
- Drill a hole at each marked point using a drill bit suitable for the anchor and ceiling material.
- Remove dust from the holes and check that their axes are perpendicular to the surface.




KLUŚ LLC
3755 9th St. Southwest
Vero Beach, FL 32968

Installation of anchors and mounts

- Inserting the anchors and installing the ceiling mounts at all prepared points.


Step 3 - Insert the mounting anchors

- Select anchors suitable for the ceiling material, thickness and load-bearing capacity, as well as the load imposed by the luminaire configuration.
- Insert the anchors perpendicular to the surface and seat them securely in the prepared holes.
- Do not use damaged, deformed or loose anchors.

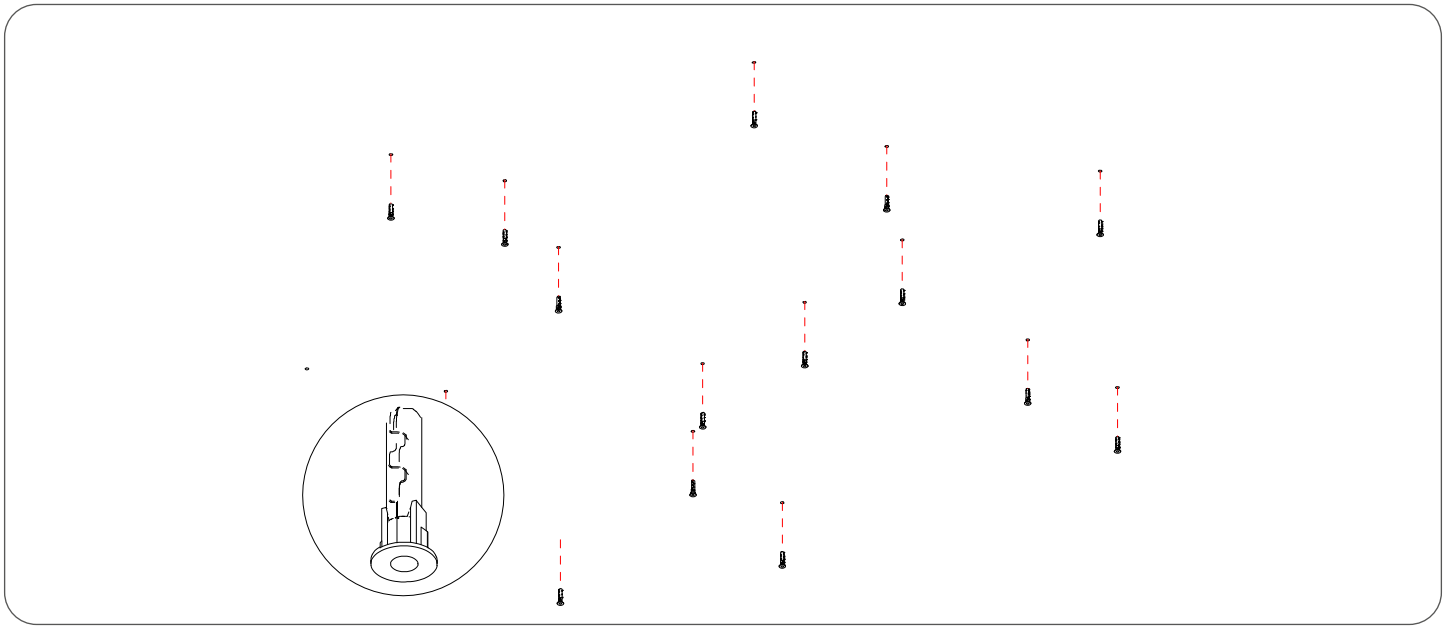

Step 4 - Install the ceiling mounts

- Each suspension point has a designated position marked on the template.
- As shown in the illustration, the screw diameter must not exceed 5 mm (0.20”).
- Tighten the mount until its flange is fully seated, without damaging the substrate or anchor.
- Check that all mounting bodies are vertical and secure.

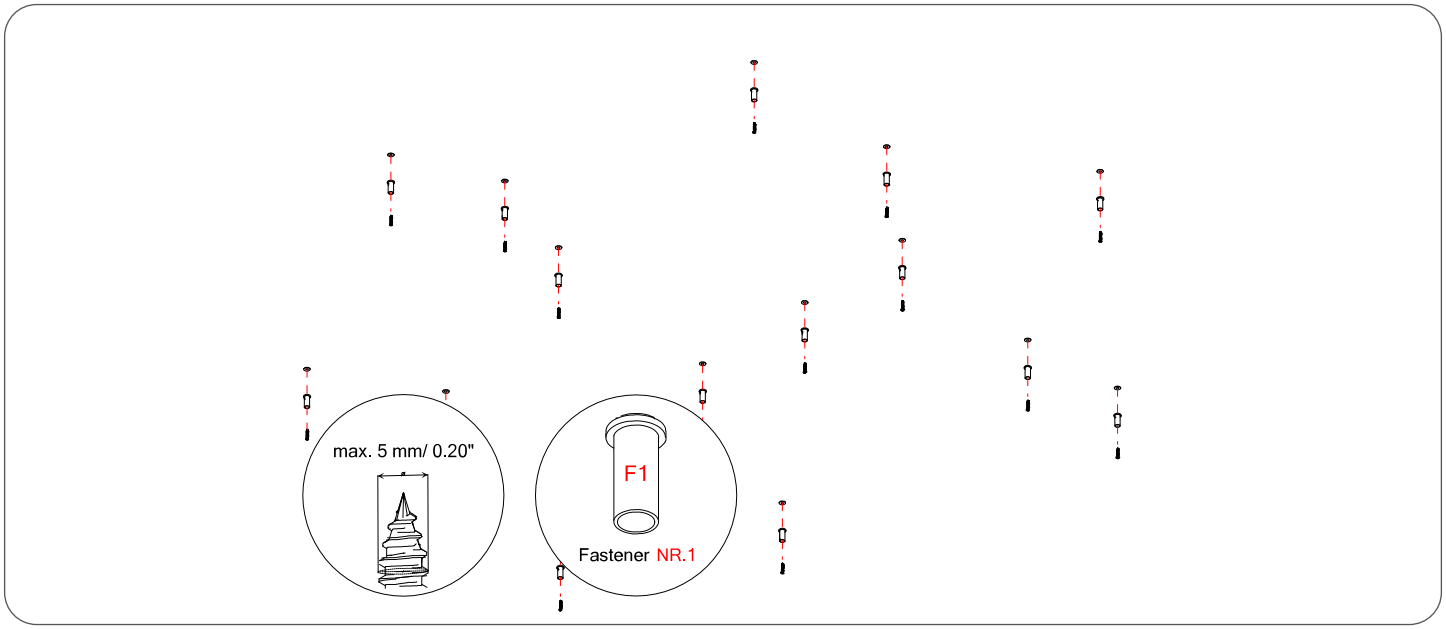


KLUŚ LLC
3755 9th St. Southwest
Vero Beach, FL 32968

Installation of ceiling components

- Assembling the ceiling mounts and preparing the opening for the 24 V DC supply cable.


Step 1 - Install the lower parts of the mounting brackets.

- Insert the lower adjustment component into the F1 housing and tighten it by rotating as shown in the illustration.
- Repeat this procedure at all suspension points.
- After installation, check that all components are evenly tightened, do not rotate freely, and have no play.

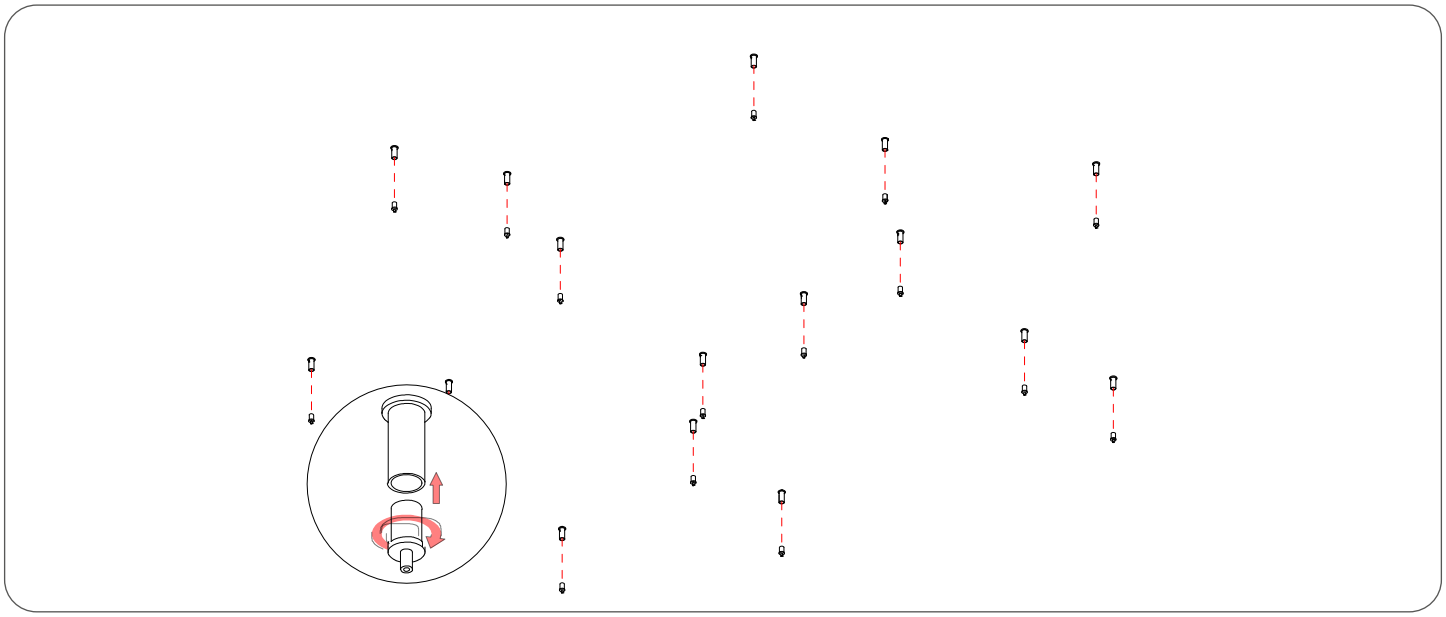

Step 2 - Drill a hole for the power cable

- Select a cable entry point near the corresponding cable outlet on the luminaire.
- Make sure there are no electrical cables or other installations at the drilling location.
- Drill a hole with a diameter of 6–7 mm (0.24–0.28”).
- Remove sharp edges and install a suitable grommet or protective sleeve to prevent damage to the cable insulation.

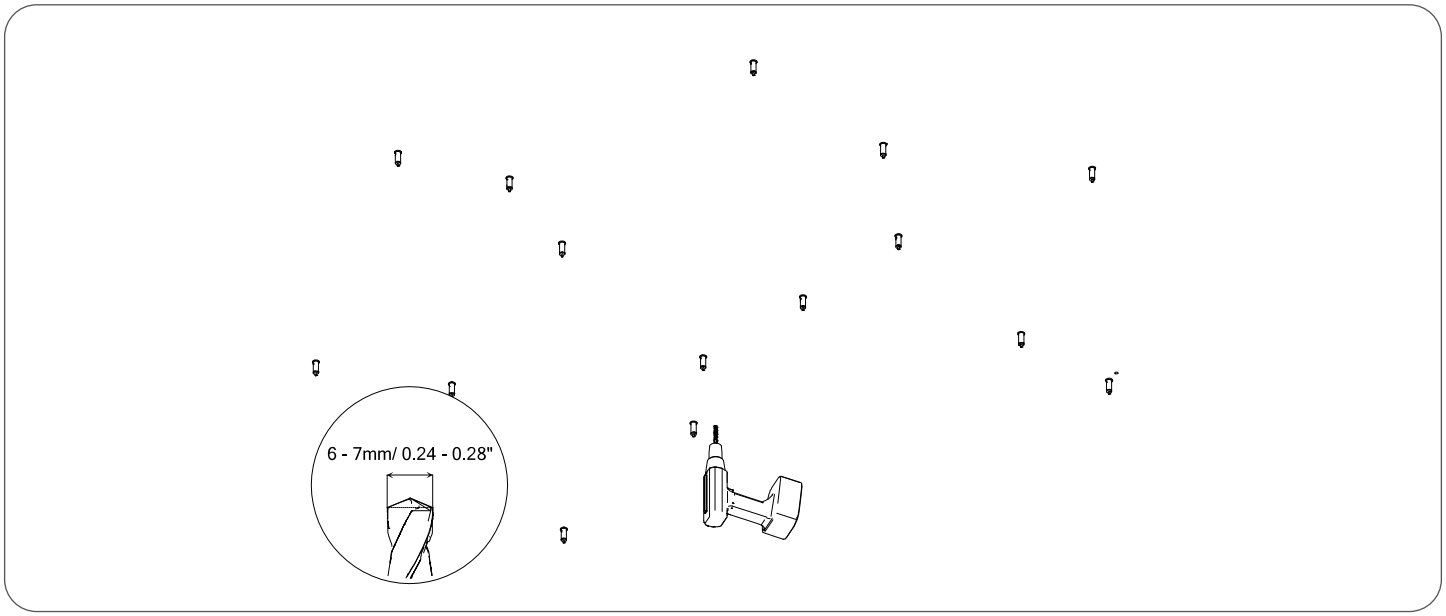


KLUŚ LLC
3755 9th St. Southwest
Vero Beach, FL 32968

Preparation of the luminaire and suspension cables

- Uncoiling the steel suspension cables and checking the lower mounts installed on the luminaire profiles.

Step 1 - Prepare all luminaire suspension points

- Place the luminaire on a clean, soft and stable surface to protect its profiles and covers from scratches.
- Uncoil the steel cables one by one at all lower mounts. Prevent loops, twisting and kinks.
- Check that each lower mount is properly seated on the profile and that its side screw is tightened.
- Arrange the free cable ends so that they can easily be inserted into the corresponding ceiling mounts when lifting the luminaire. Do not lift the luminaire by the 24 V DC cable or by a single suspension cable.
- Each suspension point on the luminaire must match the numbered suspension point on the ceiling.

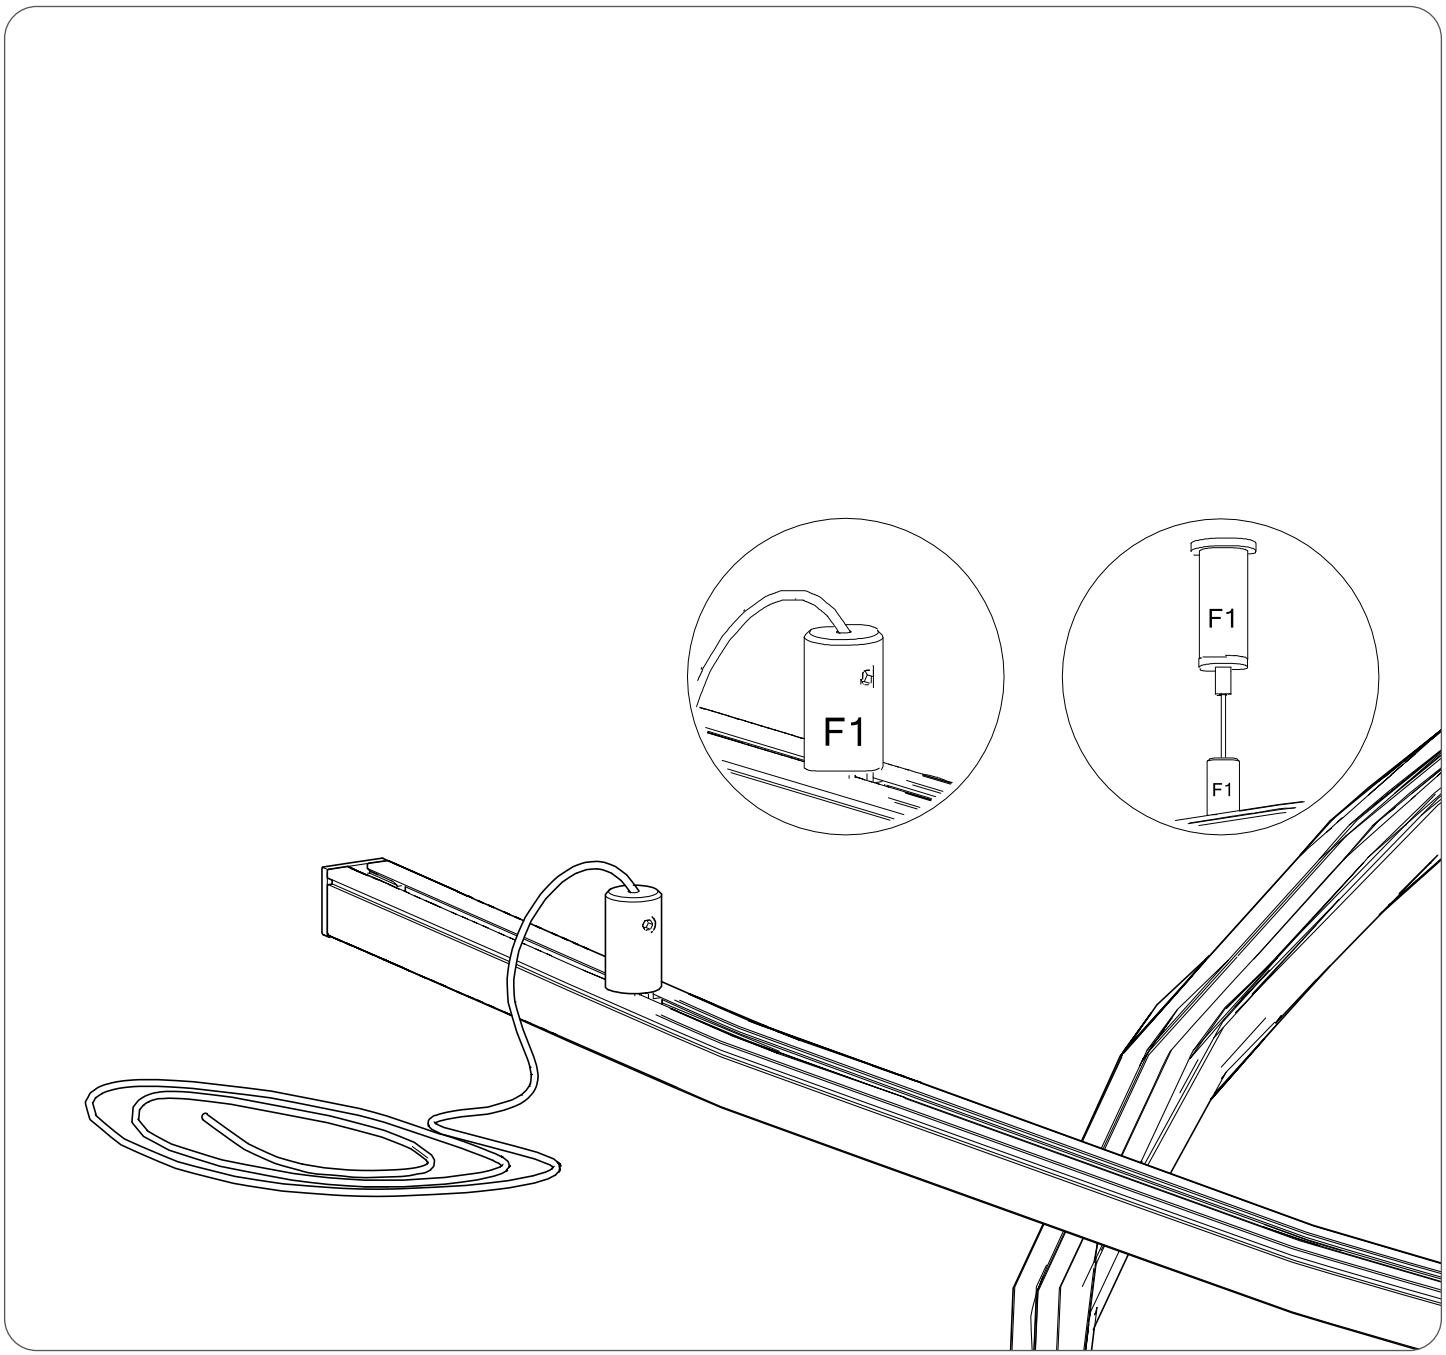


KLUŚ LLC
3755 9th St. Southwest
Vero Beach, FL 32968

Suspending the luminaire

- Lifting the luminaire, inserting the suspension cables into the ceiling mounts and initially securing the entire structure.

Step 1 - Lift the luminaire and secure the suspension cables

- Provide stable support for the luminaire and use enough installers for its size and weight.
- Raise the luminaire evenly without bending the profiles.
- Insert the free end of each suspension cable from below into its corresponding ceiling mount.
- Set the preliminary cable length, then lock it according to the mount design.
- Repeat at all suspension points.
- Remove the luminaire support only after confirming that all cables are securely locked.

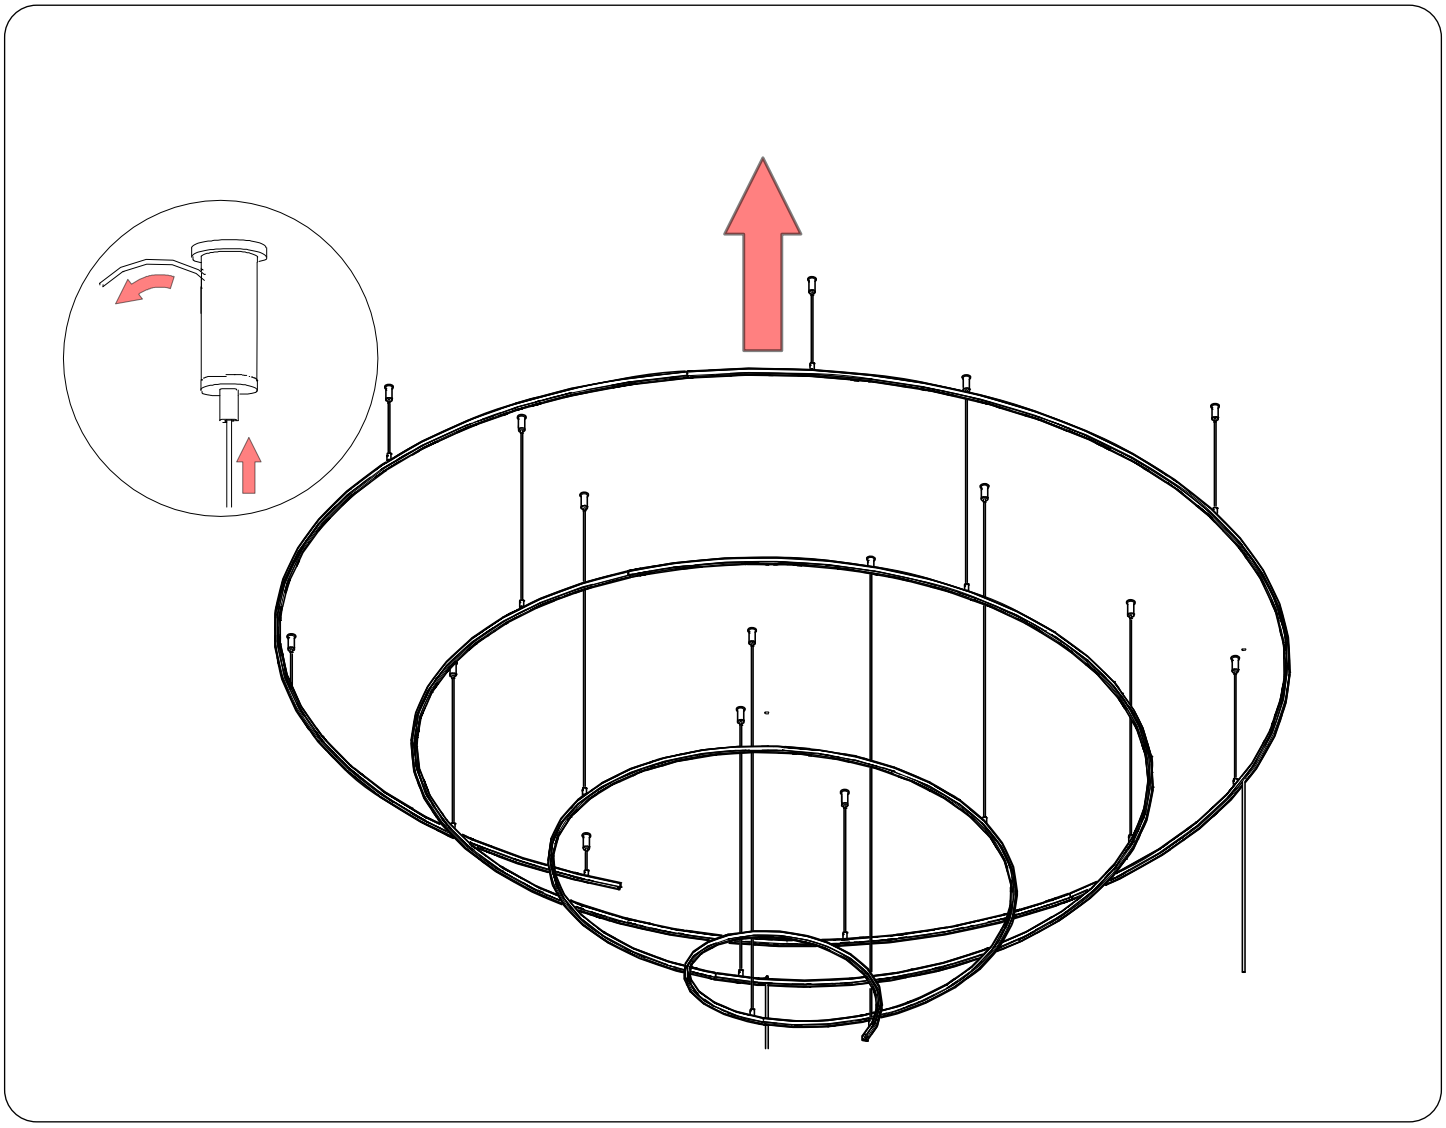


KLUŚ LLC
3755 9th St. Southwest
Vero Beach, FL 32968

Adjustment of height and geometry

- Setting the final height of individual luminaire sections and recreating the three-dimensional spiral shape.

Step 1 - Adjust the suspension cable lengths

- Support the section of the luminaire being adjusted to relieve the load on the mount.
- To change the length, press the adjuster release sleeve and slide the cable up or down.
- After releasing the sleeve, apply a slight load to the cable and check that it has locked again.
- Adjust the suspension points gradually, maintaining smooth curves in the profiles and the shape shown in the illustration.
- Inspect the luminaire from several directions. Correct the heights so that the spiral runs evenly, without twisting or local kinks.
- Leave excess cable available for later adjustment and servicing; do not cut it before the final geometry check.

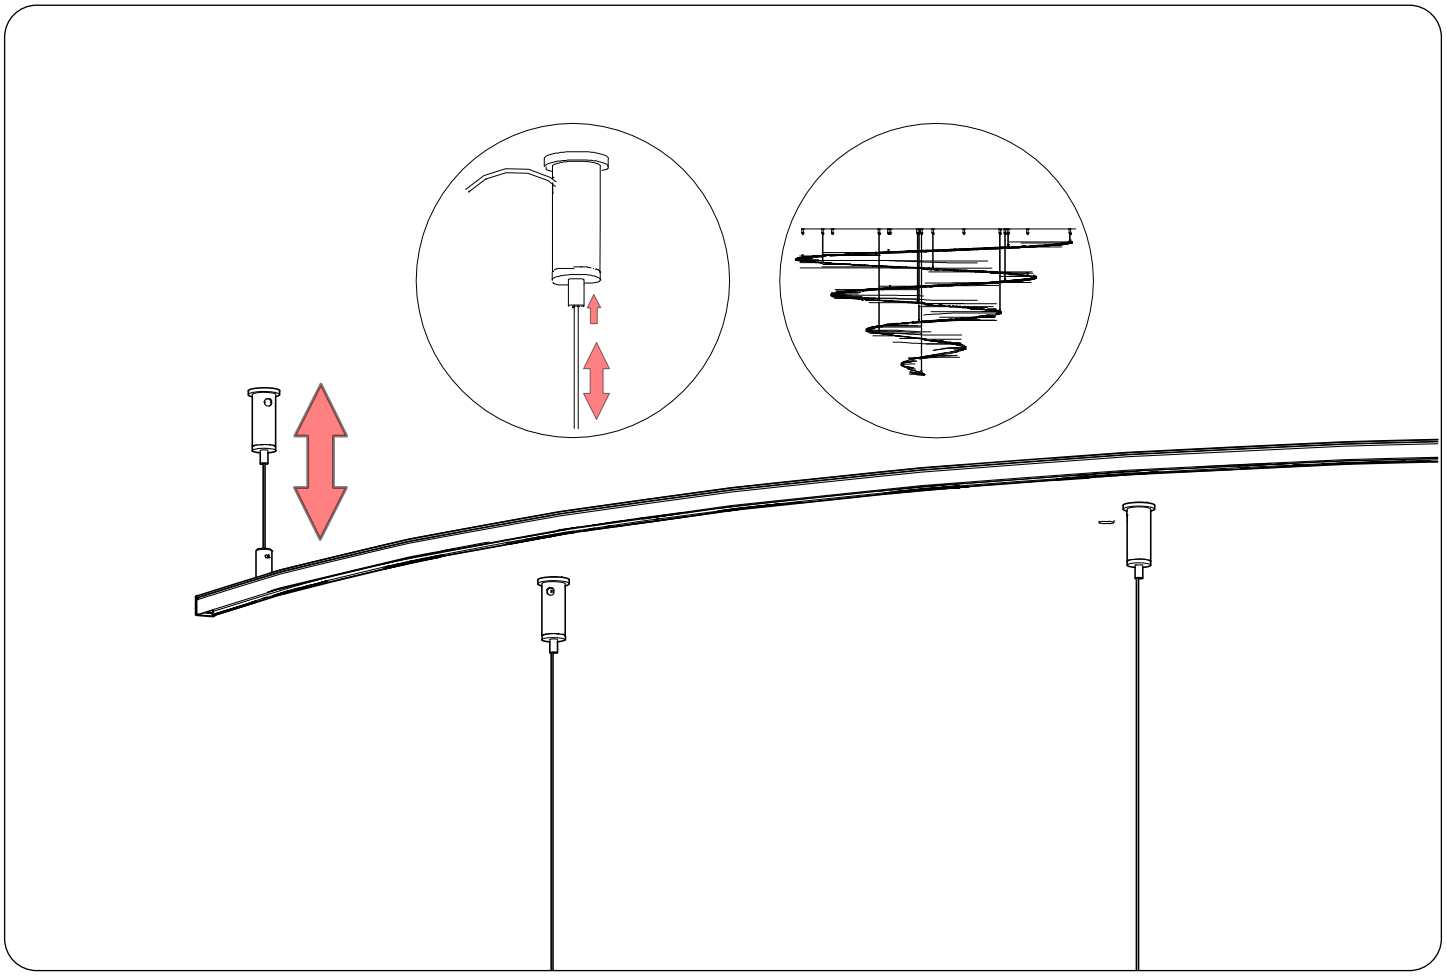


KLUŚ LLC
3755 9th St. Southwest
Vero Beach, FL 32968

Routing the 24 V DC cable

- Routing the low-voltage cable through the prepared opening and protecting it from strain.


Step 1 - Route the cable through the ceiling

- Route the supply cable from the upper part of the luminaire to the prepared opening. Feed the cable through the grommet into the installation space above the ceiling.
- Do not pull on the connection between the cable and luminaire or allow the cable to twist.
- Maintain a smooth cable route and leave enough slack for connection and future servicing.
- Secure the cable against slipping out and transferring strain to the connections.

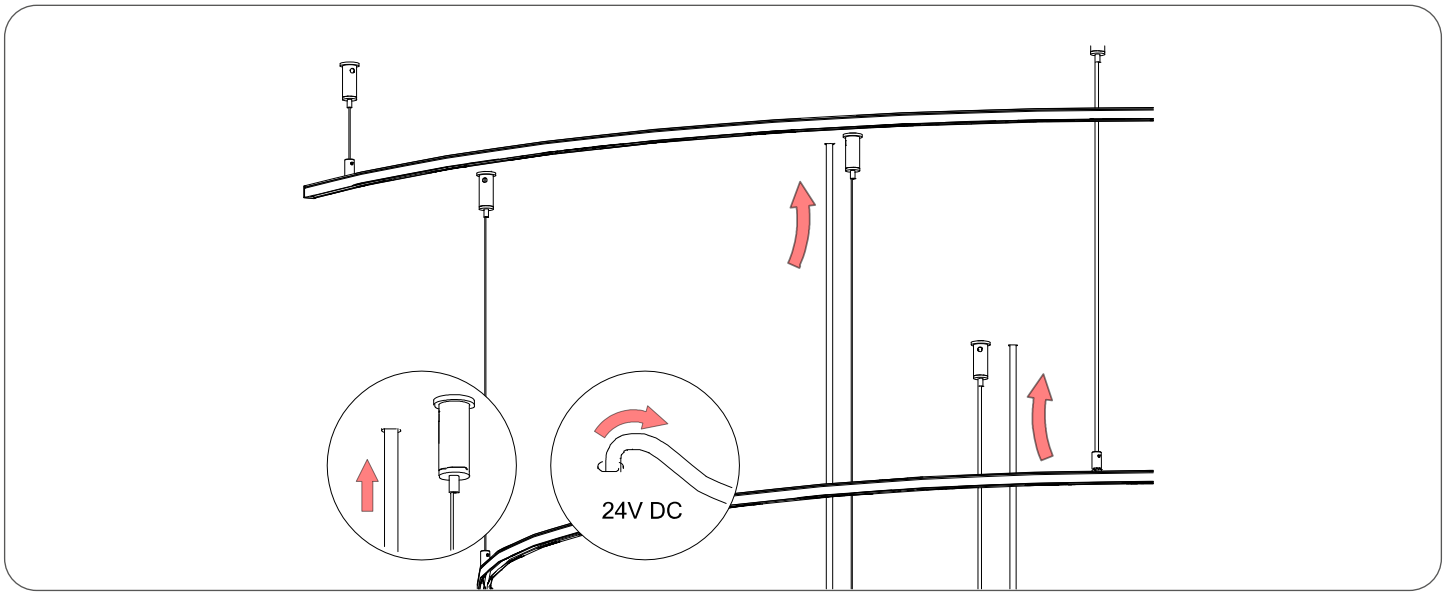

Step 2 - Place the power supply in the installation space

- If the space above the ceiling allows safe installation of the power supply, place it there.
- Secure the power supply firmly, allowing for cooling and future servicing access.
- Do not place the power supply on cables or near sharp edges.

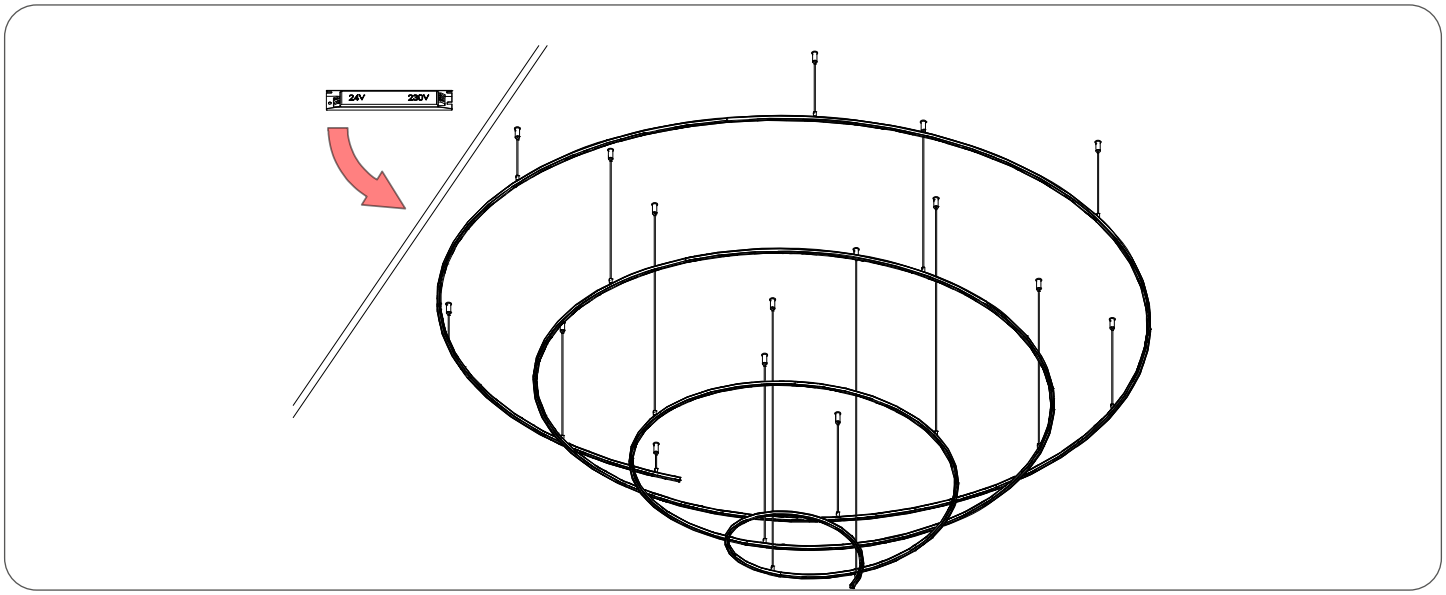

KLUŚ LLC
3755 9th St. Southwest
Vero Beach, FL 32968

Connecting the 24 V DC power supply


- Power supply installation, connection and final inspection

RULES

- Make all connections with the power disconnected.
- Use a 24 V DC power supply rated for the luminaire configuration.
- The 220-240 V AC side of the power supply must be connected by a suitably qualified person.
- Observe the correct polarity: “+” to the positive terminal, “-” to the negative terminal.
- After connection, secure the wires against being pulled out or strained.

Step 1 - Prepare the power supply and connect the luminaire cable

- If the power supply has not yet been prepared for connection, prepare its 24 V DC output according to the power supply manufacturer’s instructions.
- Strip the wire ends to a length suitable for the terminal used.
- Connect the positive and negative conductors according to the terminal markings.
- Check that the connection is secure. Conductors must not be loose or exposed outside the terminal.
- Arrange the cable in the installation space so that it is not pinched or in contact with sharp edges.

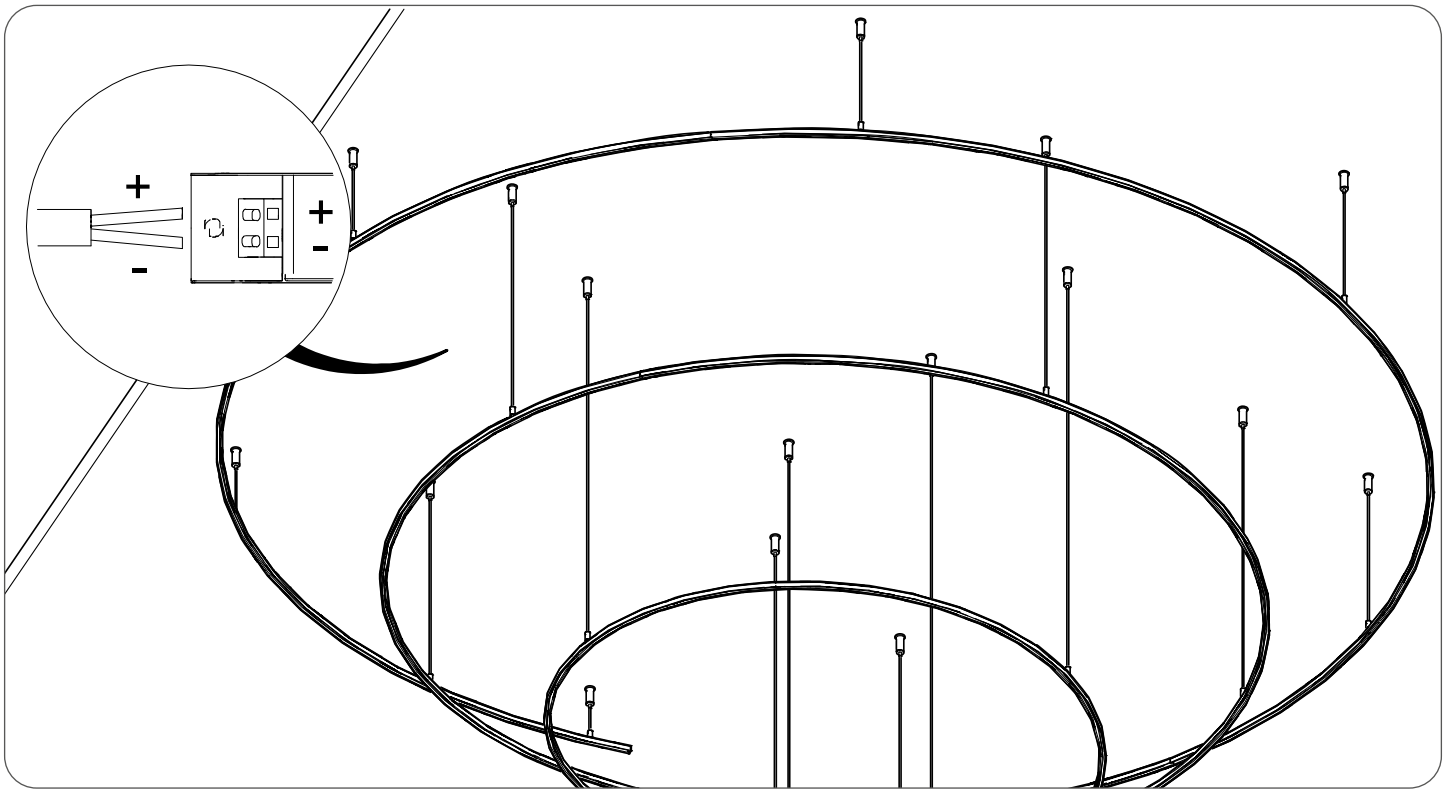


Step 2 - Final inspection

- Check that all mounting points and cable locks are secure.
- Verify the correct polarity of the wires.
- Make sure the cable is neither strained nor pinched.
- Check that the power supply is accessible and adequately ventilated.
- After completing the inspection, switch on the power and check that the luminaire operates correctly.

KLUŚ LLC
3755 9th St. Southwest
Vero Beach, FL 32968

Maintenance, disposal, EU compliance and disassembly

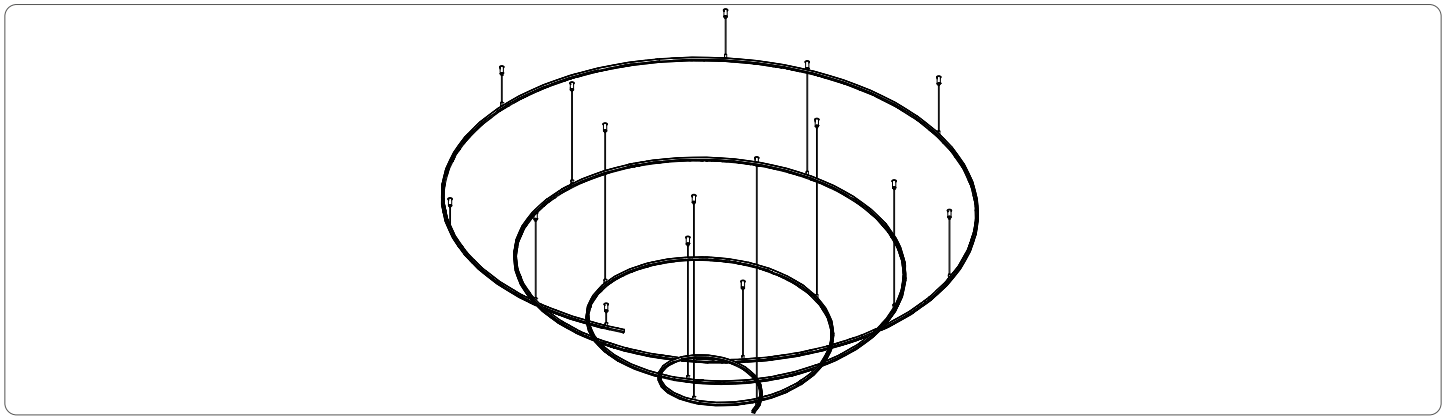

CLEANING:

- Clean with a dry or slightly damp cloth.
- Do not use abrasive cleaners or harsh chemicals.

DISPOSAL

- Do not dispose of with household waste.
- Take the product to a collection point for waste electrical and electronic equipment.

COMPLIANCE

- The product complies with the requirements of standard PN-EN 60598-1.

LUMINAIRE DISASSEMBLY

Disassemble in the reverse order of installation. Perform all operations with the power disconnected.

WARNING!

Before starting disassembly, always disconnect the 220-240 V AC, 50/60 Hz power supply. When removing the luminaire, secure it against falling.

- Disconnect the luminaire cable from the 24 V DC output of the power supply.
- Support the luminaire and loosen the clamping screws of the ceiling mounts.
- Remove the suspension cables from the ceiling mounts while continuously supporting and controlling the weight of the luminaire. Remove the suspension components and ceiling fixings if necessary.
- Have a suitably qualified person disconnect the power supply on the 220-240 V AC side.
- After disassembly, secure the installation wires in accordance with applicable regulations.

After disassembly, secure the installation wires in accordance with applicable regulations.

KLUŚ LLC
3755 9th St. Southwest
Vero Beach, FL 32968